




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5	6	7	8
REV.	ECN NO.	DATE	SIGN

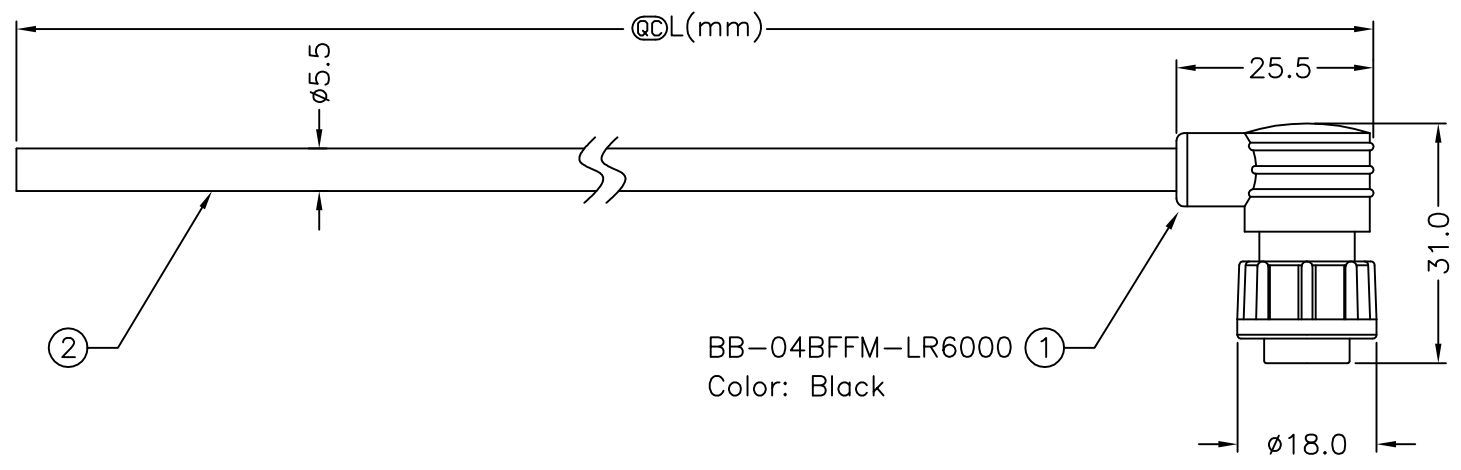


BB-04BFFM-LR6000 (1)
Color: Black

BB-04BFFM-LR6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @D Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 20AWG*4C+Drain+Al/My
PVC Jacket UV Resistant OD=5.5mm
 - * Cable Length Tolerance:1M~10M±5%mm,11M~99M±500mm.



Pin Assignments
Front View

4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
	Pin Out

UNIT:mm	TITLE Standard, Cable Lock 4Pin F Conn. F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Raul Paulo Canja	DATE 2006/03/31
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1		DWG NO BB-04BFFM-LR6AXX	CHECKED BY Cloyd Grezula	DATE 2006/04/27
REV. A	SIZE A4	@C :Inspection Item	CUSTOMER ALTW	APPROVED BY Win	DATE 2006/04/27	8 FMWIG702-01-01A2