



5	6	7	8
REV.	ECN NO.	DATE	SIGN
			DESCRIPTION

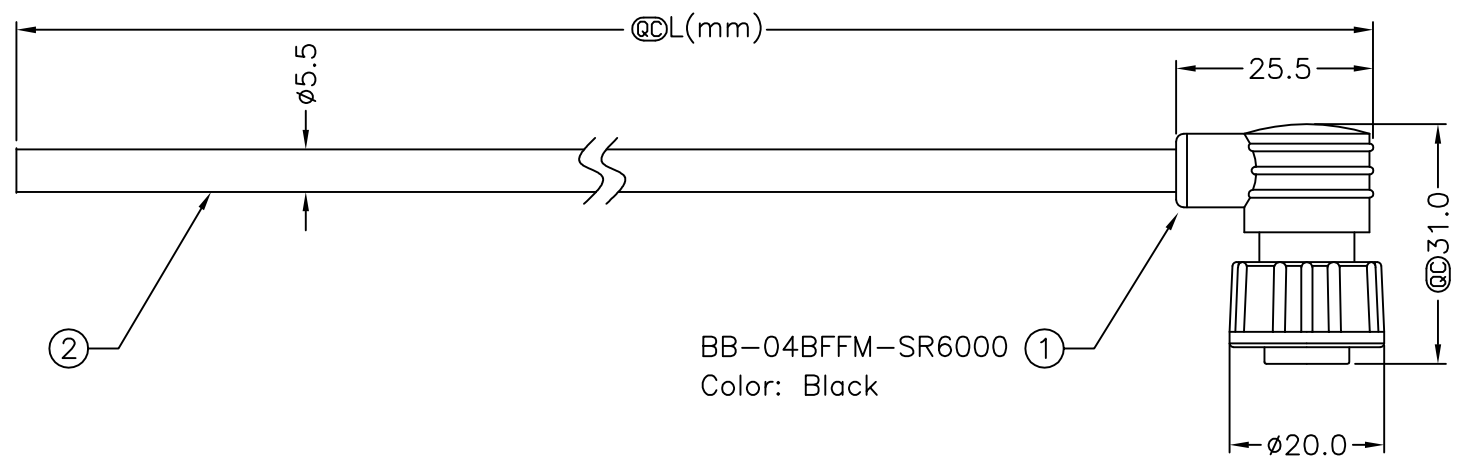




BB-04BFFM-SR6000 (1)
Color: Black

BB-04BFFM-SR6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ⋮
- ⋮
- 99:99Meters



Conn.



Pin Assignments
Front View

4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
	Pin Out

- Note:
- * @D Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 20AWG*4C+Drain+Al/My
PVC Jacket UV Resistant OD=5.5mm
 - * Cable Length Tolerance:1M~10M±5%mm,11M~99M±500mm.

UNIT:mm	Standard		Amphenol LTW		ITEM NO	DRAWN BY	DATE
TOLERANCE	Cable Screw 4Pin F Conn. F Pin		安費諾亮泰企業股份有限公司		DWG NO	Allan Frank Valentino	2007/02/06
±0.5 mm	SCALE	SHEET			BB-04BFFM-SR6AXX	CHECKED BY	DATE
	Free	1 OF 1			ALTW	Robert Dabu	2007/02/12
	REV. A	SIZE A4	@C :Inspection Item		CUSTOMER	APPROVED BY	DATE
						Win	2007/02/12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.