




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1610120~23	2015/12/30	Ruru	Change Logo

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

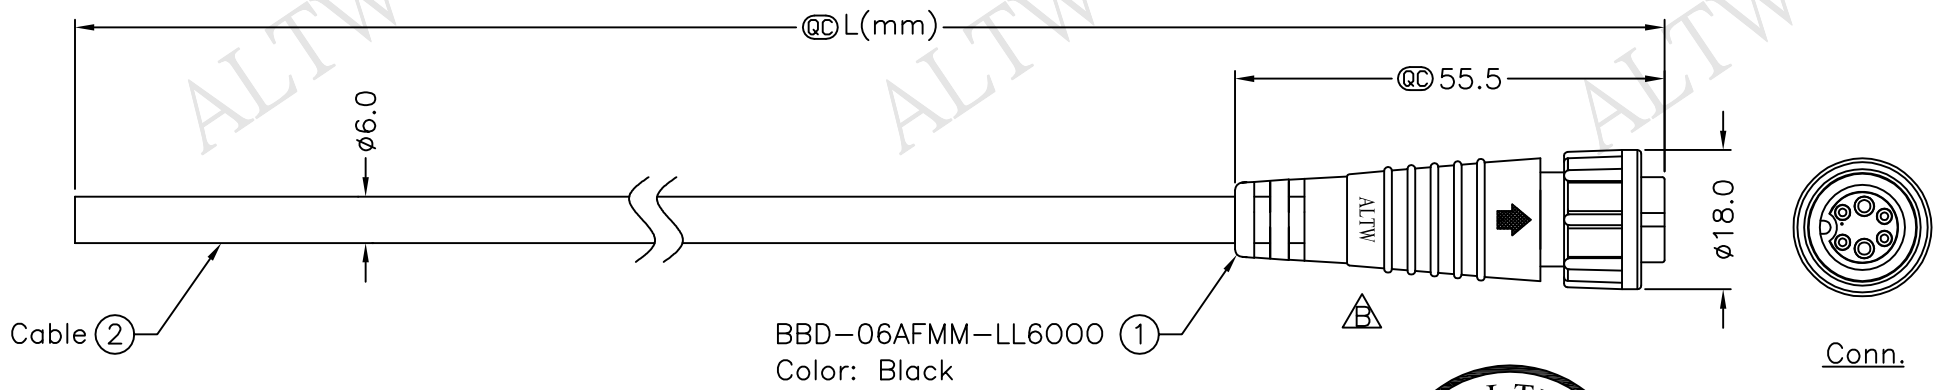


BBD-06AFMM-LL6000 ①
Color: Black

BBD-06AFMM-LL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ⋮
 99:99Meters
 Cable Length(L):01~99Meters



- △ Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464(20AWG*2C+24AWG*4C)+Drain+Al/My, PVC Jacket UV Resistant, OD=6.0, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

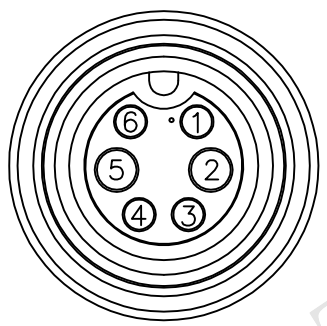

Pin Assignments
Front View

6	Gray (20AWG)
5	Blue (20AWG)
4	Yellow (24AWG)
3	Green (24AWG)
2	Brown (20AWG)
1	White (24AWG)
Conn.	Wire Color
Pin Out	

UNIT:mm		TITLE	Standard
TOLERANCE		Cable Screw 6Pin F Conn M Pin	
±0.5 mm		SCALE	Free
		SHEET	1 OF 1
		REV.	B
		SIZE	A4
		@C	:Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2015/12/30
DWG NO	CHECKED BY	DATE
BBD-06AFMM-SL6AXX	Rita	2015/12/30
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2015/12/30