



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1190025~28	2011/08/18	Jiang Jun Huo	Change SR View
C	LEN1610124~27	2015/12/30	Ruru	Change Logo
D	C222016	2022/12/30	Matt	△ X1

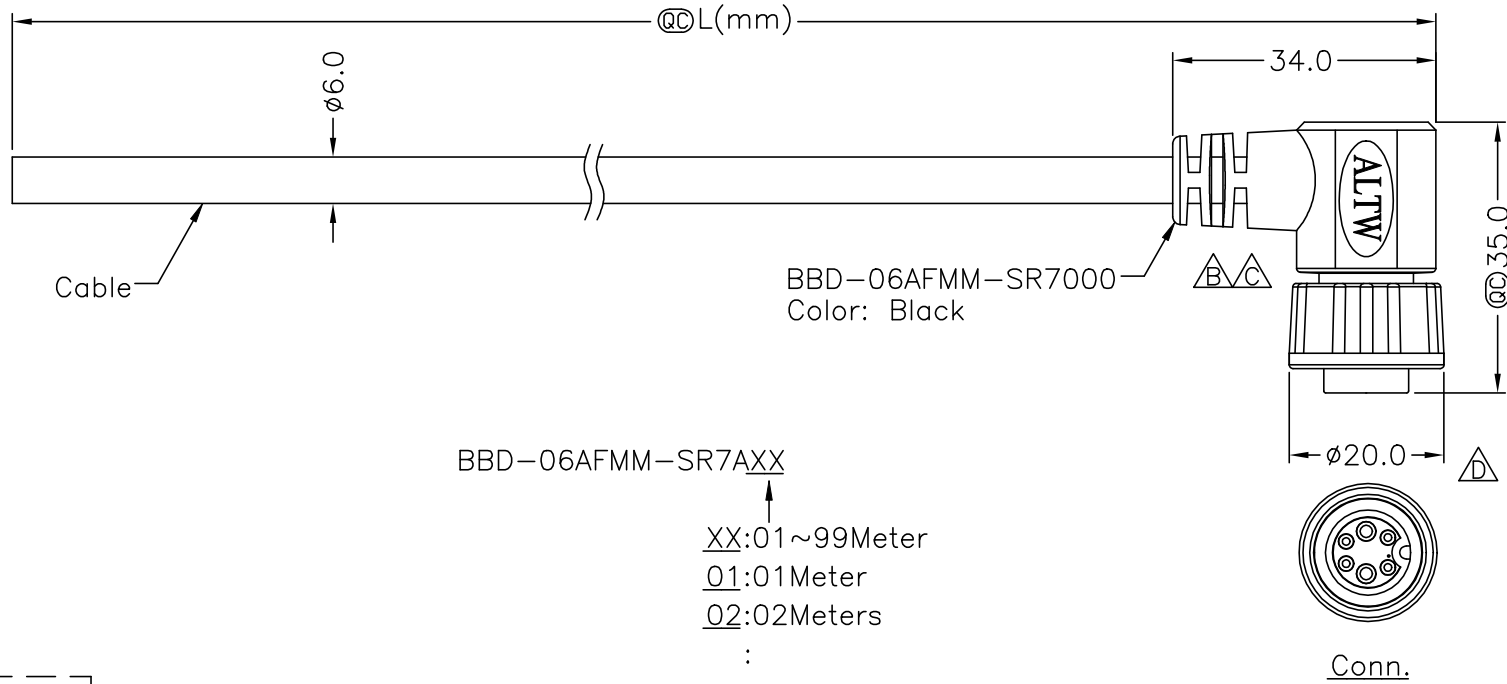

Pin Assignments  
Front View

6	Gray (24AWG)	灰
5	Blue (20AWG)	藍
4	Yellow (24AWG)	黃
3	Green (24AWG)	綠
2	Brown (20AWG)	棕
1	White (24AWG)	白
Conn.	Wire Color	
	Pin Out	

BBD-06AFMM-SR7AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters

Note:  
 \* @@Important Dimension To Check.  
 \* Waterproof Rate: IP67  
 \* Housing: Black, Nylon+GF  
 \* Pin: Copper Alloy, Gold Plated  
 \* Cable: UL2464(20AWG\*2C+24AWG\*4C)+Drain+Al/My, Black, PVC Jacket UV Resistant, OD=6.0  
 △ \* Cable Length Tolerance:01M:±40mm  
 02M~05M:±60mm  
 06M~10M:±100mm  
 11M~30M:±200mm  
 31M~99M:±500mm

UNIT:mm	Standard		<b>Amphenol LTW</b>		ITEM NO	DRAWN BY	DATE
TOLERANCE	Cable Screw 6Pin F Conn M Pin		<b>安費諾亮泰企業股份有限公司</b>		DWG NO	Ruru	2015/12/30
±0.5 mm	SCALE	SHEET			BBD-06AFMM-SR7AXX	CHECKED BY	DATE
	Free	1 OF 1				Rita	2015/12/30
	REV.	SIZE			CUSTOMER	APPROVED BY	DATE
	D	A4			ALTW	Lisa	2015/12/30
		@C :Inspection Item					

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.