



REV. A	ECN NO.	DATE 2007/01/17	SIGN	DESCRIPTION Rev.01 to Rev.A
B	C222016	2022/12/29	Matt	\triangle B x1

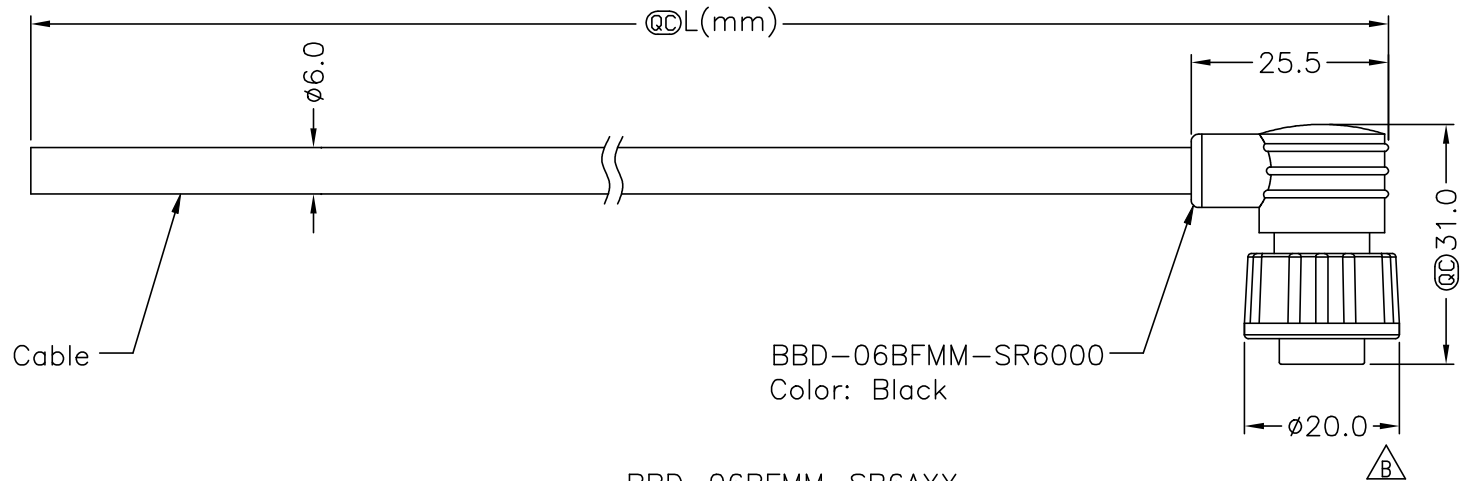


BBD-06BFMM-SR6000
Color: Black

BBD-06BFMM-SR6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Conn.



Pin Assignments
Front View

6	Gray	(24AWG)
5	Blue	(20AWG)
4	Yellow	(24AWG)
3	Green	(24AWG)
2	Brown	(20AWG)
1	White	(24AWG)
Conn.	Wire Color	
	Pin Out	

- Note:
- * @ Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464(20AWG*2C+24AWG*4C)+Drain+Al/My,Black
PVC Jacket UV Resistant, OD=6.0
 - * Cable Length Tolerance:1M~10M±5%mm,11M~99±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Screw 6Pin F Conn M Pin	
SCALE	Free	SHEET 1 OF 1
REV. B	SIZE A4	QC :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BBD-06BFMM-SR6AXX
CUSTOMER	ALTW

DRAWN BY	Raul Paulo Canja
CHECKED BY	Robert Dabu
APPROVED BY	Win

DATE	2007/01/17
DATE	2007/02/05
DATE	2007/02/12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.