


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0488~491	2010/11/29	Ivan	Change View
C	LEN1660055~058	2016/05/27	Ruru	Change Logo


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

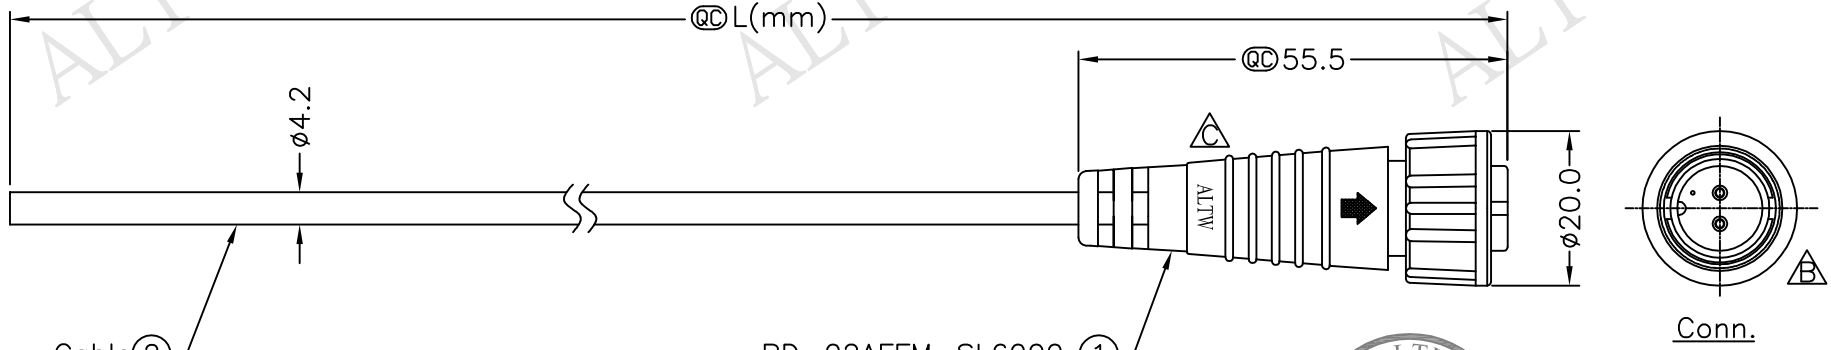


Cable ②

BD-02AFFM-SL6000 ①
Color: Black

BD-02AFFM-SL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @@Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing:Nylon+GF ,Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*2C+D+Al/My PVC Jacket (UV Resistant) OD=4.2, Black
 - * Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



Pin Assignments
Front View

2	Red	紅
1	Black	黑
Conn.	Wire Color	
Pin Out		

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Screw 2Pin F Conn. F Pin		
SCALE	Free	SHEET	1 OF 1
REV.	C	SIZE	A4
@@ :Inspection Item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BD-02AFFM-SL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2016/05/27
DATE	2016/05/27
DATE	2016/05/27

1 2 3 4 5 6 7 8

F

E

D

C

B

A

1 2 3 4 5 6 7 8