





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0493~496	2010/11/29	Ivan	Change View
C	LEN1190035~38	2011/08/18	Jiang Jun Hua	Change SR View
D	LEN1610137~40	2015/12/31	Ruru	Change Logo

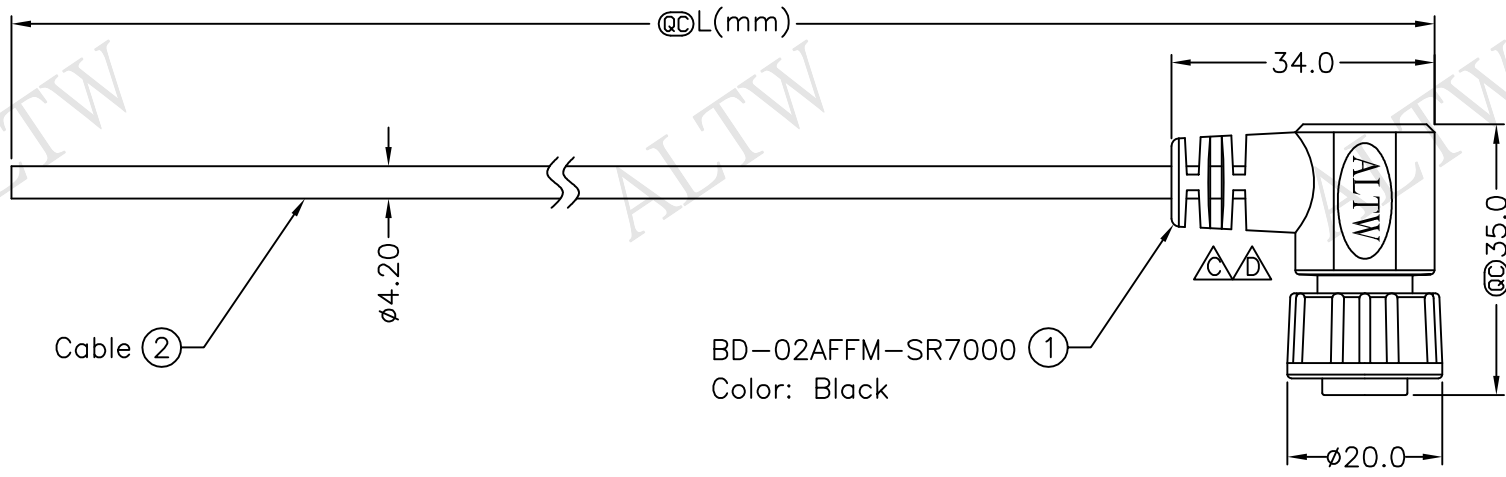

BD-02AFFM-SR7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @D Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black.
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*2C+Drain+Al/My PVC Jacket UV Resistant, OD=4.2mm, Black
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

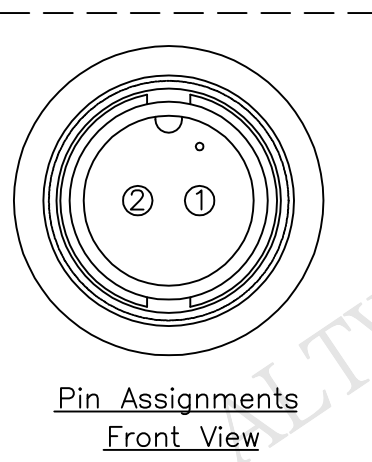

2	Red	紅
1	Black	黑
Conn.	Wire Color	
Pin Out		

UNIT:mm TOLERANCE ±0.5 mm	TITLE Standard Cable Screw 2Pin F Conn F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2015/12/31
	SCALE Free	SHEET 1 OF 1		DWG NO BD-02AFFM-SR7AXX	CHECKED BY Rita	DATE 2015/12/31
REV. D	SIZE A4	@C :Inspection Item	CUSTOMER ALTW	APPROVED BY Lisa	DATE 2015/12/31	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.