



5	6	7	8
REV. B	ECN NO. LEN1660064~067	DATE 2016/05/27	SIGN Ruru
			DESCRIPTION Change Logo & Note


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

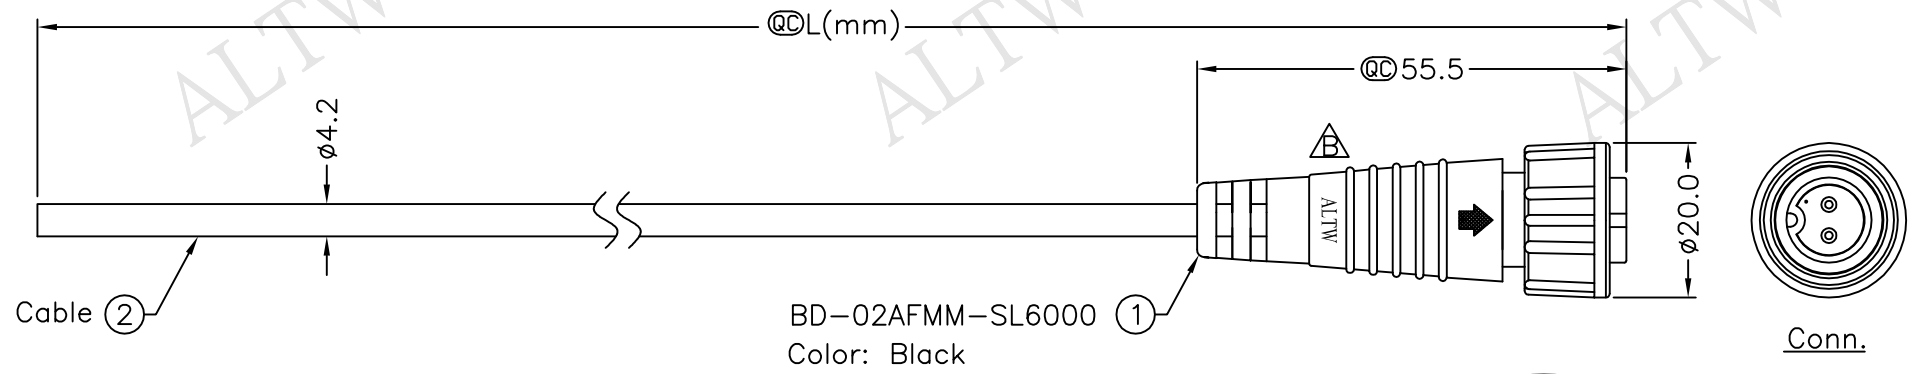

BD-02AFMM-SL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*2C+Drain+Al/My, UV Resistant, OD=4.2mm, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

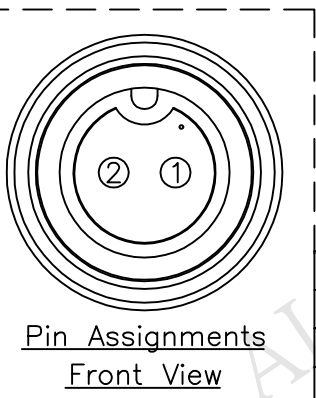

2	Red
1	Black
Conn.	Wire Color
Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Screw 2Pin F Conn M Pin		
SCALE	Free	SHEET	1 OF 1
REV. B	SIZE A4	@C :Inspection Item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BD-02AFMM-SL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2016/05/27
DATE	2016/05/27
DATE	2016/05/27