


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1630025~028	2016/02/15	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

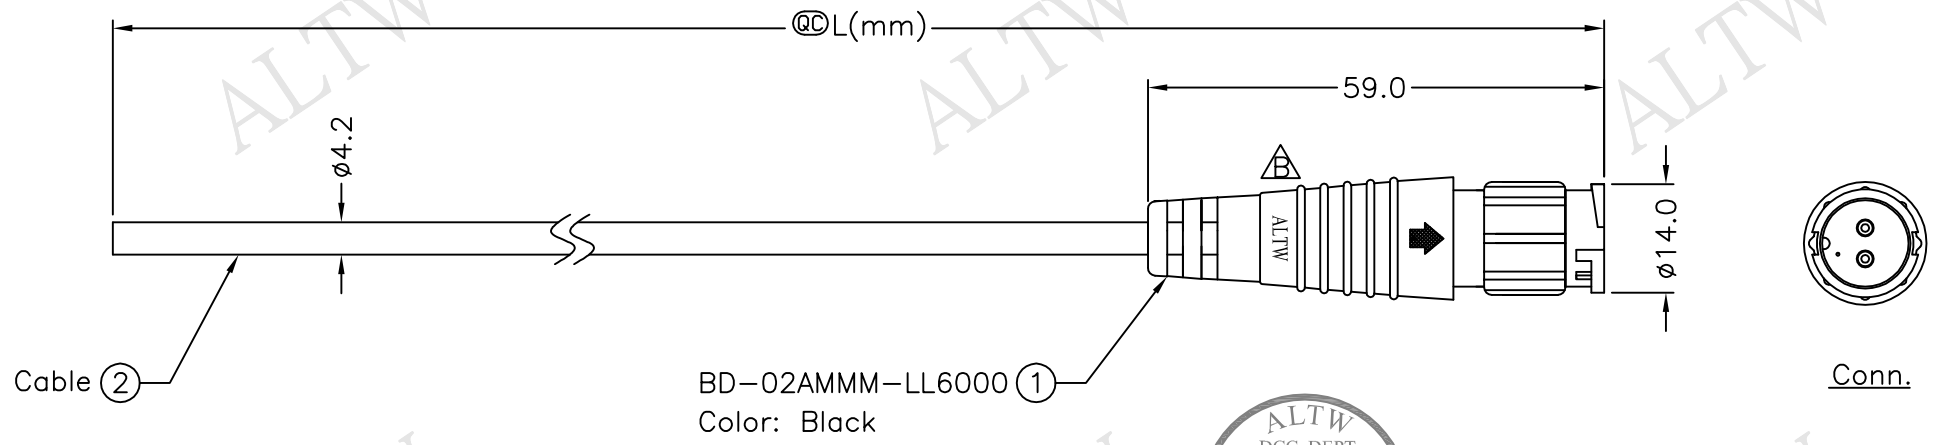


Cable ②

BD-02AMMM-LL6000 ①
Color: Black

BD-02AMMM-LL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @@ Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Connector: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*2C+Drain+Al/My PVC Jacket UV Resistant OD=4.2mm, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



2	Red
1	Black
Conn.	Wire Color
	Pin Out

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Lock 2Pin M Conn M Pin	
SCALE	Free	SHEET 1 OF 1
REV.	B	SIZE A4
		QC : Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2016/02/15
DWG NO	CHECKED BY	DATE
BD-02AMMM-LL6AXX	Rita	2016/02/15
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016/02/15

1
F
E
D
C
B
A

2
3

4
5

6
7

8
8 FMW0702-01-01A2