






REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0512~515	2010/11/29	Ivan	Change View

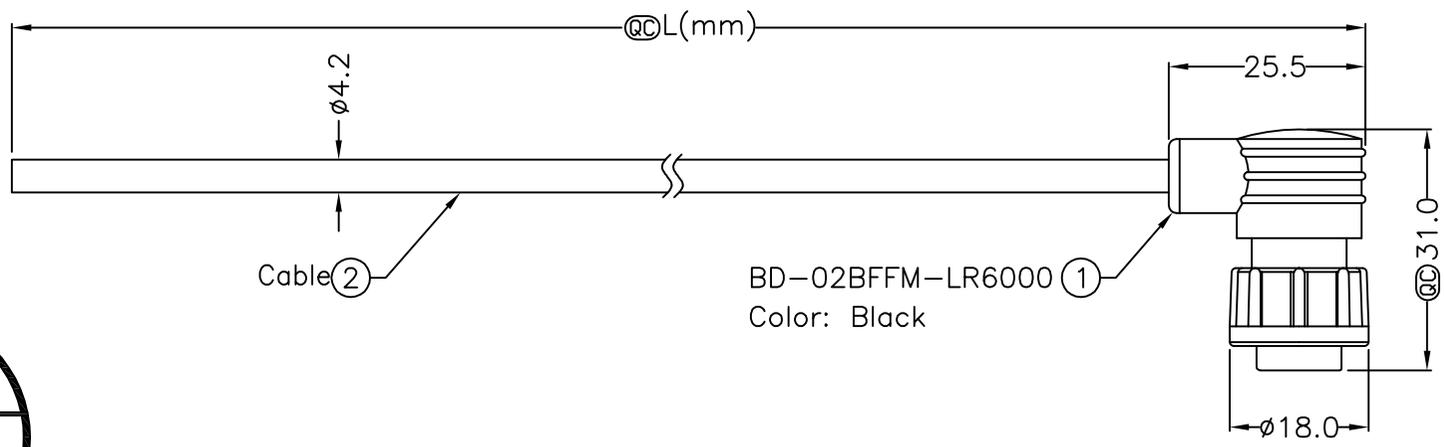

BD-02BFFM-LR6AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ⋮
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing:Nylon+GF ,Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*5C+D
PVC Jacket (UV Resistant) OD=4.2,Black
 - * Cable Length Tolerance:01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

2	Red	紅
1	Black	黑
Conn.	Wire Color	
Pin Out		

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Lock 2Pin F Conn F Pin		
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
@C :Inspection Item			

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ivan	2010/11/29
BD-02BFFM-LR6AXX	Willy	2010/11/29
ALTW	Yitung	2010/11/29

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.