


| | | | |
|------|---------|------|------|
| 5 | 6 | 7 | 8 |
| REV. | ECN NO. | DATE | SIGN |
| | | | |
| | | | |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

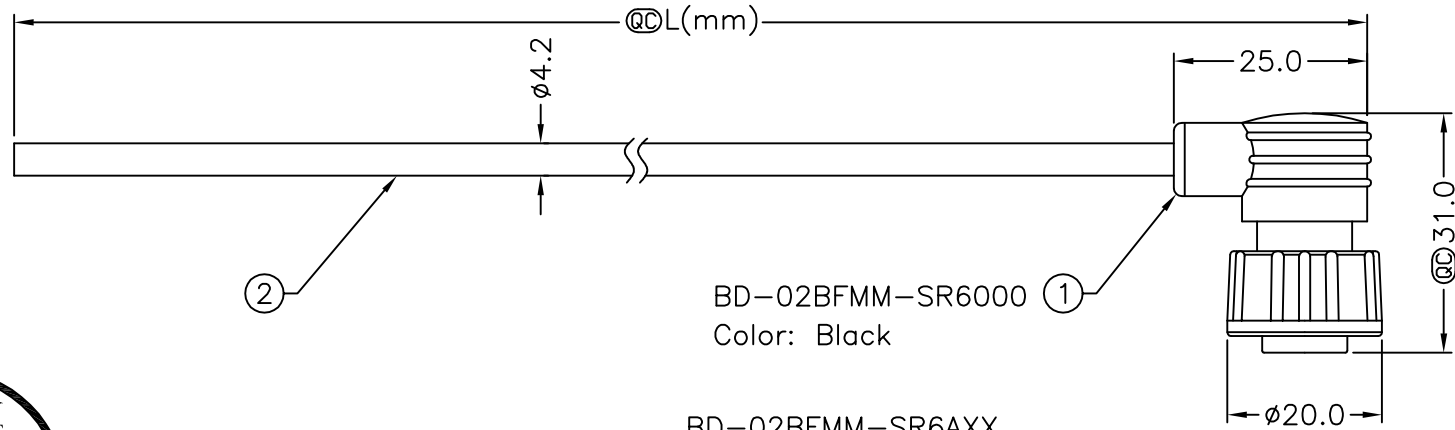


BD-02BFMM-SR6000
Color: Black




BD-02BFMM-SR6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- :
- :
- 99:99Meters

Cable Length(L):01~99Meters



Conn.

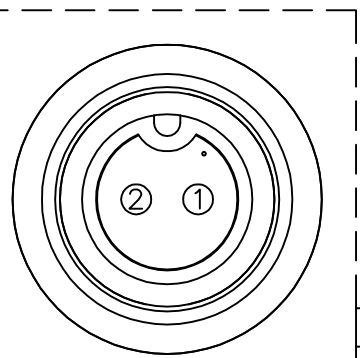

Pin Assignments
Front View

| | |
|---------|------------|
| 2 | Red |
| 1 | Black |
| Conn. | Wire Color |
| Pin Out | |

Note:

- * @DL Important Dimension To Check.
- * Waterproof Rate: IP66
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Cable: Black, UL2464 24AWG*2C+Drain+Al/My PVC Jacket UV Resistant, OD=4.2mm
- * Cable Length Tolerance: 1M~10M±5%mm, 11M~99M±500mm.

| | |
|-----------|---------|
| UNIT:mm | |
| TOLERANCE | ±0.5 mm |

| | | | |
|-----------------------|--|-------|--------|
| TITLE | Standard Cable Screw 2Pin F Conn M Pin | | |
| SCALE | Free | SHEET | 1 OF 1 |
| REV. | A | SIZE | A4 |
| @DL : Inspection Item | | | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | |
|----------|------------------|
| ITEM NO | |
| DWG NO | BD-02BFMM-SR6AXX |
| CUSTOMER | ALTW |

| | |
|-------------|------------------|
| DRAWN BY | Raul Paulo Canja |
| CHECKED BY | Robert Dabu |
| APPROVED BY | Win |

| | |
|------|------------|
| DATE | 2007/02/10 |
| DATE | 2007/02/12 |
| DATE | 2007/02/12 |