



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8B0683~686	2008/11/07	Ivan	Change to pin hole
D	LEN1610428~431	2016/01/21	Ruru	Change Logo & Note
E	LEN1790406~409	2017/09/27	Ruru	Update View

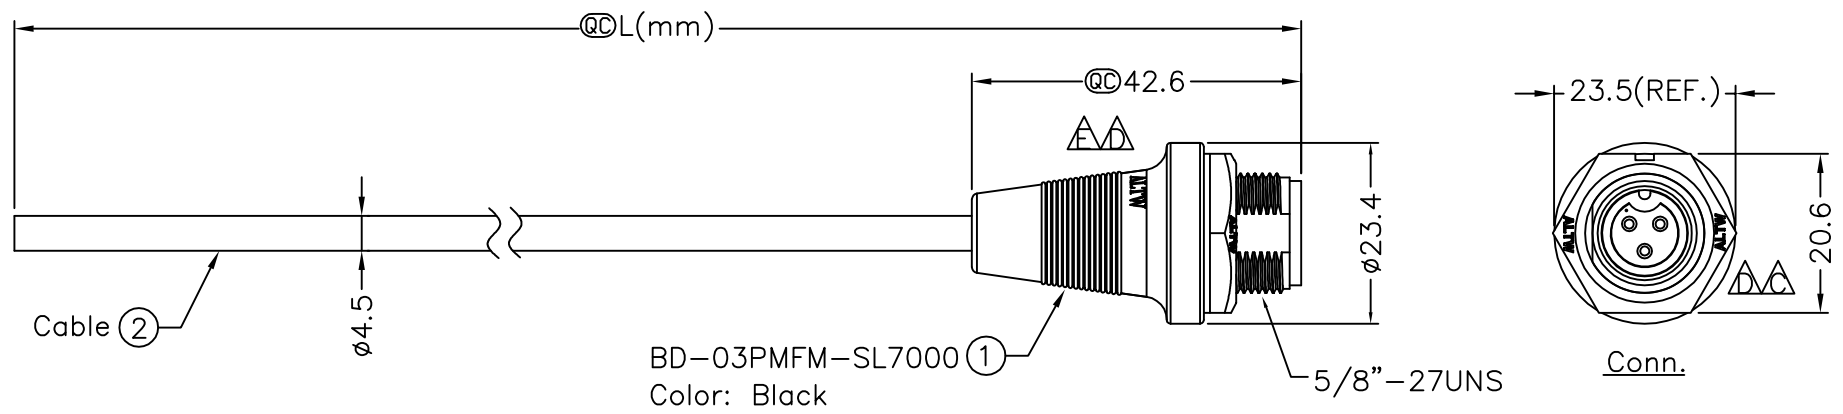



BD-03PMFM-SL7000 ①
Color: Black

Conn.

3	Black 黑色
2	Blue 藍色
1	Brown 棕色
Conn.	Wire Color

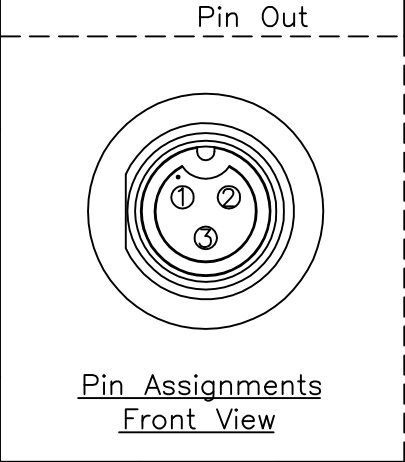

BD-03PMFM-SL7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters

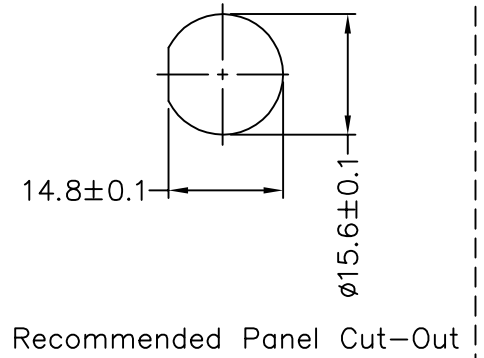

- Note:
- * @C Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Black,Nylon+GF
 - * Female Pin: Copper Alloy,Gold Plated
 - * Gasket: Black,EPDM
 - * Nut: Black,Nylon+GF
 - * Cable: UL2464 24AWG*3C+Drain+Al/My Black,PVC Jacket UV Resistant, OD=4.5
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 2.5mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 3.5mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm		TITLE
TOLERANCE		Standard,Cable Screw 3Pin M Conn. F Pin
±0.5 mm	SCALE Free	SHEET 1 OF 1
	REV. E	SIZE A4
		@C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
BD-03PMFM-SL7AXX	Ruru	2017/09/27
ALTW	Rita	2017/09/27
	Max	2017/09/27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.