


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660181~184	2016/05/30	Ruru	Change Logo & Note


1 2 3 4 5 6 7 8

F
E
D
C
B
A


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

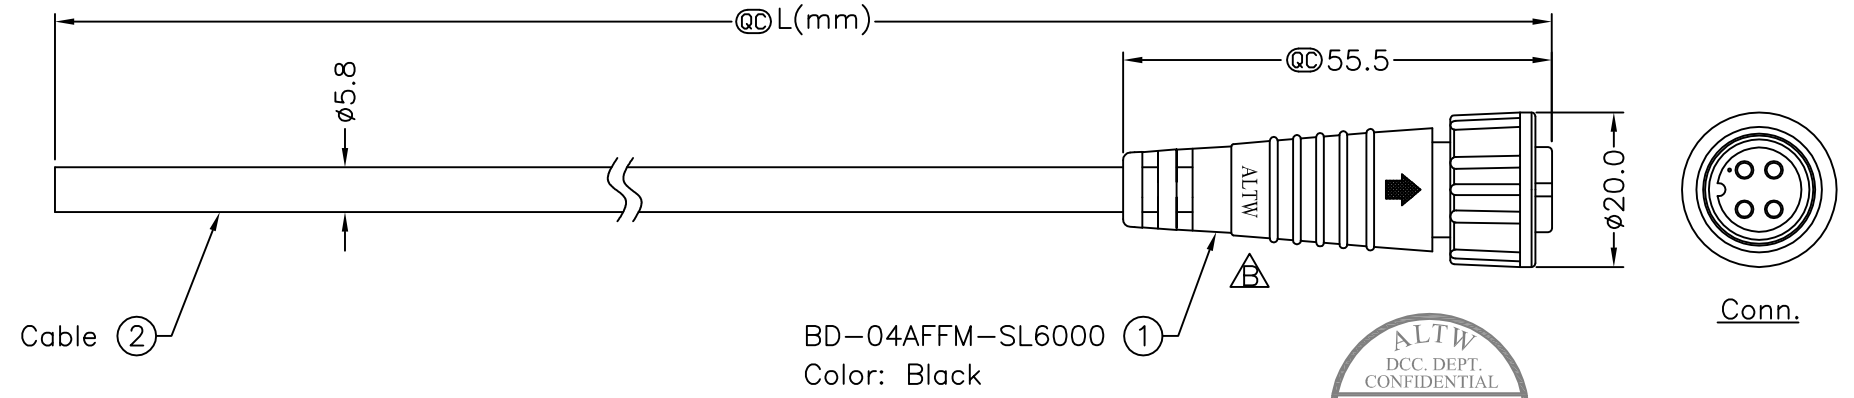

BD-04AFFM-SL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @@Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*4C+D+Al/My, PVC Jacket (UV Resistant) ,OD=5.8, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



Pin Assignments
Front View

4	Yellow	黃
3	Red	紅
2	Green	綠
1	White	白
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Screw 4Pin F Conn. F Pin	
SCALE	Free	SHEET 1 OF 1
REV. B	SIZE A4	QC :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2016/05/30
DWG NO BD-04AFFM-SL6AXX	CHECKED BY Rita	DATE 2016/05/30
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/05/30