



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660185~188	2016/06/03	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

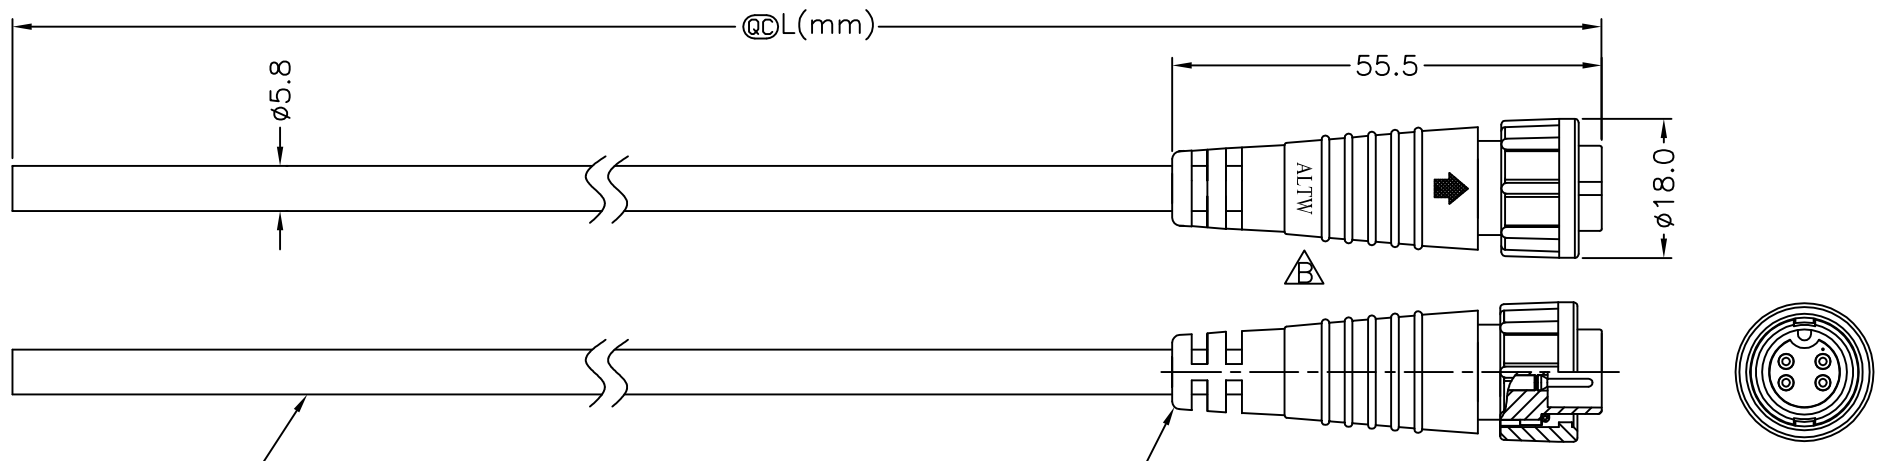

Cable ②
 BD-04AFMM-LL6AXX

BD-04AFMM-LL6000 ①
 Color: Black




XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters

Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*4C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.8mm, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



Pin Assignments
 Front View

4	Yellow
3	Red
2	Green
1	White
Conn.	Wire Color
Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Lock 4Pin F Conn M Pin		
SCALE	Free	SHEET 1	OF 1
REV.	B	SIZE	A4
④ :Inspection Item			

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2016/05/30
BD-04AFMM-LL6AXX	Rita	2016/05/30
ALTW	Lisa	2016/05/30