


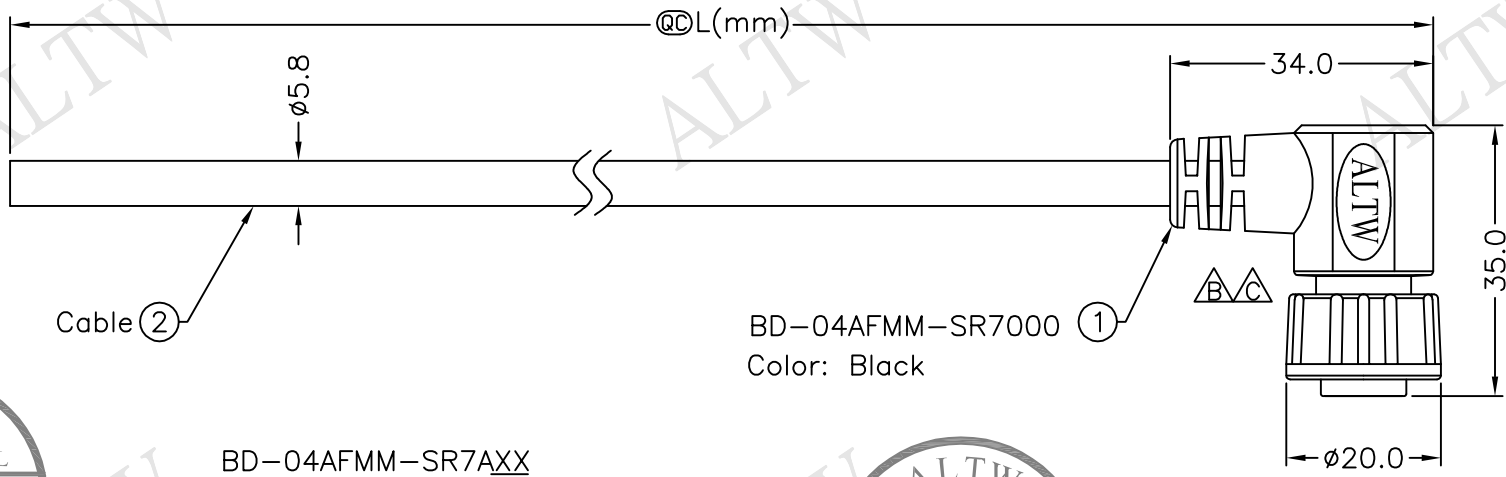


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN11A0030~33	2011/08/23	Jiang Jun Hu	Change SR View
C	LEN1610276~79	2016/01/06	Ruru	Change Logo




BD-04AFMM-SR7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Conn.

- Note:
- * @D Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*4C+Drain+Al/My
Black PVC Jacket UV Resistant OD=5.8mm
 - * Cable Length Tolerance:01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

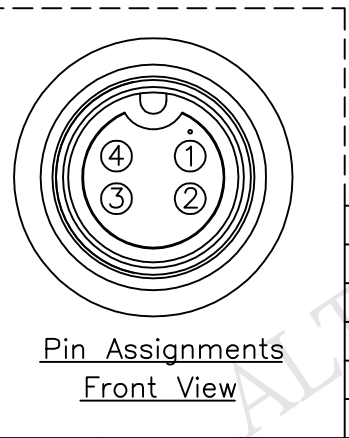

Yellow	黃	4	△
Red	紅	3	
Green	綠	2	
White	白	1	
Wire Color		Conn.	
Pin Out			

UNIT:mm		TITLE	Standard Cable Screw 4Pin F Conn M Pin		ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	SCALE	Free	SHEET 1 OF 1	BD-04AFMM-SR7AXX	Ruru	2016/01/06
REV.	C	SIZE	A4	QC : Inspection Item	CUSTOMER	CHECKED BY	DATE
					ALTW	Rita	2016/01/06
						APPROVED BY	DATE
						Lisa	2016/01/06

Amphenol LTW
 安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.