



REV	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1630342~345	2016/02/16	Ruru	Change Logo & Note

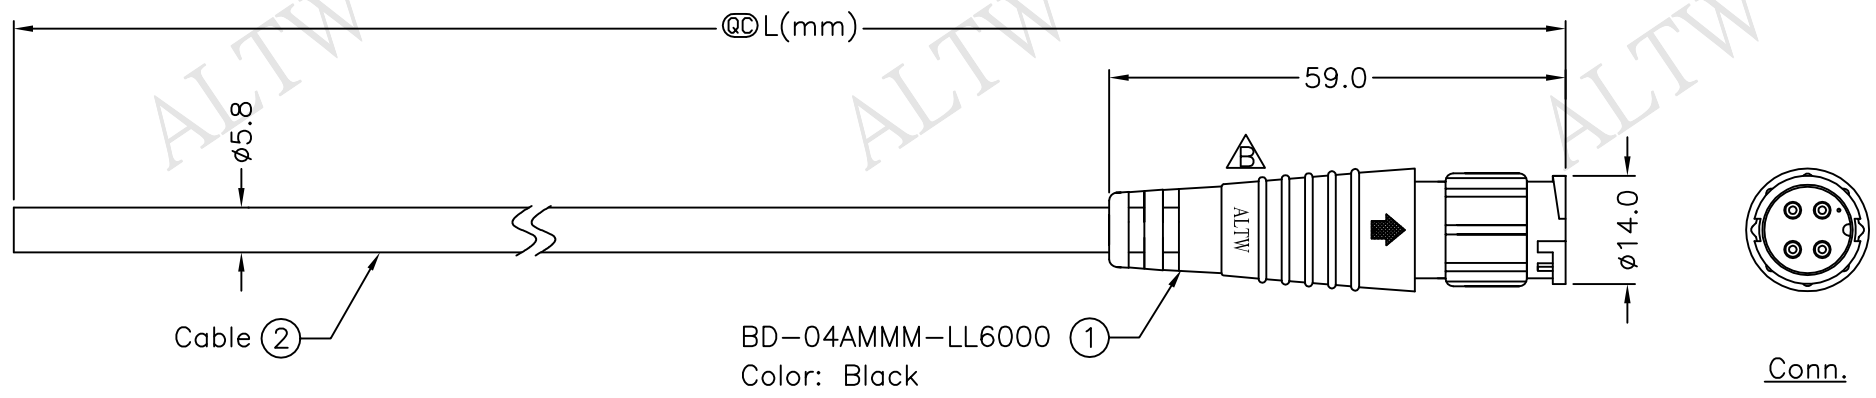

Cable ②

BD-04AMMM-LL6000 ①
Color: Black


Conn.



BD-04AMMM-LL6AXX


XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters



Pin Assignments
Front View

4	Yellow
3	Red
2	Green
1	White
Conn.	Wire Color
	Pin Out



Notes:

- * @C Important Dimension To Check.
- * Waterproof Rate: IP66
- * Connector: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 24AWG*4C+Drain+Al/My PVC Jacket UV Resistant OD=5.8mm, Black
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard, Cable Lock 4Pin M Conn. M Pin	
SCALE	Free	SHEET 1 OF 1
REV. B	SIZE A4	@C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BD-04AMMM-LL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru	DATE	2016/02/16
CHECKED BY	Rita	DATE	2016/02/16
APPROVED BY	Lisa	DATE	2016/02/16

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.