



5	6	7	8
REV.	ECN NO.	DATE	SIGN

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

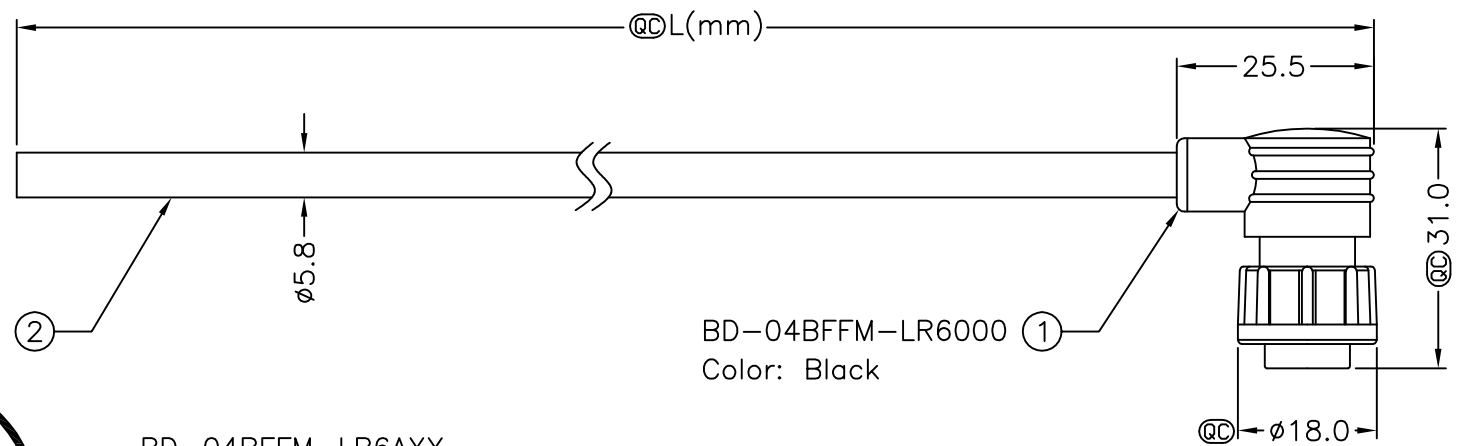



BD-04BFFM-LR6000 (1)
Color: Black




BD-04BFFM-LR6AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters



Conn.

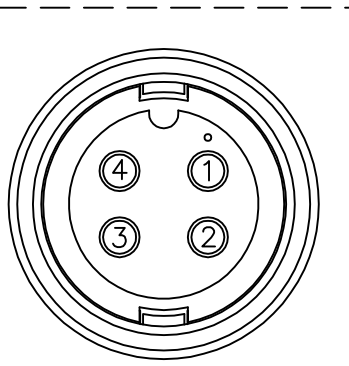

Pin Assignments
Front View

4	Yellow
3	Red
2	Green
1	White
Conn.	Wire Color
	Pin Out

Note:

- * @C Important Dimension To Check.
- * Waterproof Rate: IP66
- * Housing: Black, Nylon+GF
- * Female Pin: Copper Alloy, Gold Plated
- * Cable: Black, UL2464 24AWG*4C+Drain+Al/My
PVC Jacket UV Resistant, OD=5.8mm
- * Cable Length Tolerance: 1M~10M±5%mm, 11M~99M±500mm.

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Lock 4Pin F Conn F Pin	
SCALE	Free	SHEET 1 OF 1
REV. A	SIZE A4	@C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BD-04BFFM-LR6AXX
CUSTOMER	ALTW

DRAWN BY	Ferdinand Velarde
CHECKED BY	Raul Paulo Canja
APPROVED BY	Win

DATE	2006/04/03
DATE	2006/05/01
DATE	2006/05/01