


5	6	7	8
REV.	ECN NO.	DATE	SIGN

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.




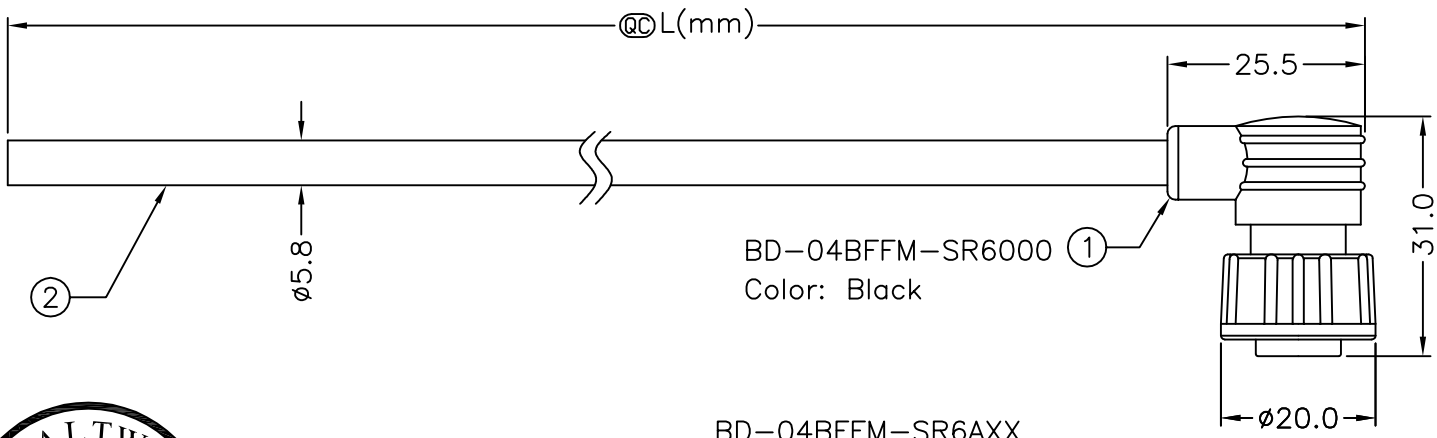


BD-04BFFM-SR6000 (1)
Color: Black

BD-04BFFM-SR6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ⋮
- 99:99Meters

Cable Length(L):01~99Meters

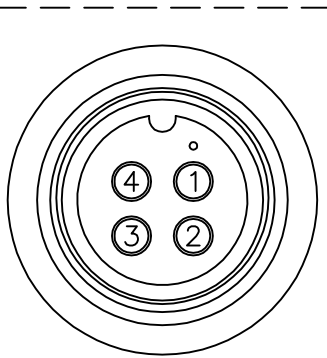

Pin Assignments
Front View

4	Yellow
3	Red
2	Green
1	White
Conn.	Wire Color
	Pin Out

Note:

- * @Q Important Dimension To Check.
- * Waterproof Rate: IP66
- * Housing: Black, Nylon+GF
- * Female Pin: Copper Alloy, Gold Plated
- * Cable: Black,UL2464 24AWG*4C+Drain+Al/My PVC Jacket UV Resistant, OD=5.8mm
- * Cable Length Tolerance:1M~10M±5%mm, 11M~99M±500mm.

UNIT:mm	TITLE Standard Cable Screw 4Pin F Conn F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ferdinand Velarde	DATE 2006/04/03
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1		DWG NO BD-04BFFM-SR6AXX	CHECKED BY Raul Paulo Canja	DATE 2006/05/01
REV. A	SIZE A4	@Q :Inspection Item	CUSTOMER ALTW	APPROVED BY Win	DATE 2006/05/01	8 FMWIG702-01-01A2