



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-840080~83	2008/04/21	Zhang Jin	Change Note.
C	LEN-960156~159	2009/06/16	Li Xiu Zhi	Change $\phi 5.8$ TO $\phi 5.0$
D	LEN1660465~468	2016/06/03	Ruru	Change Logo

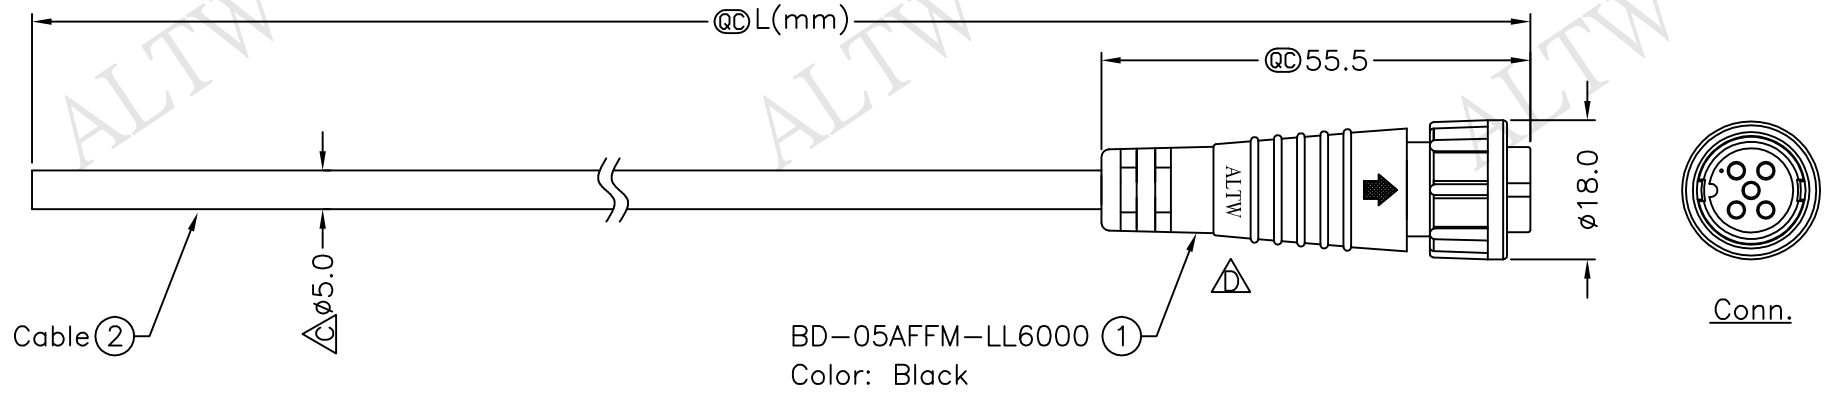

BD-05AFFM-LL6000
Color: Black




BD-05AFFM-LL6AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterprooff Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 24AWG*5C+D+Al/My PVC Jacket (UV Resistant) OD=5.0
 - * Cable Length Tolerance:
 - 01M:±40mm
 - 02M~05M:±60mm
 - 06M~10M:±100mm
 - 11M~30M:±200mm
 - 31M~99M:±500mm



Pin Assignments
Front View

5	Green	綠
4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE		Standard	
Cable Lock 5Pin F Conn. F Pin			
SCALE	Free	SHEET	1 OF 1
REV.	D	SIZE	A4
@C :Inspection Item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BD-05AFFM-LL6A <u>XX</u>
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2016/06/03
DATE	2016/06/03
DATE	2016/06/03

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.