REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660469~472	2016/06/03	Ruru	Change Logo & Note

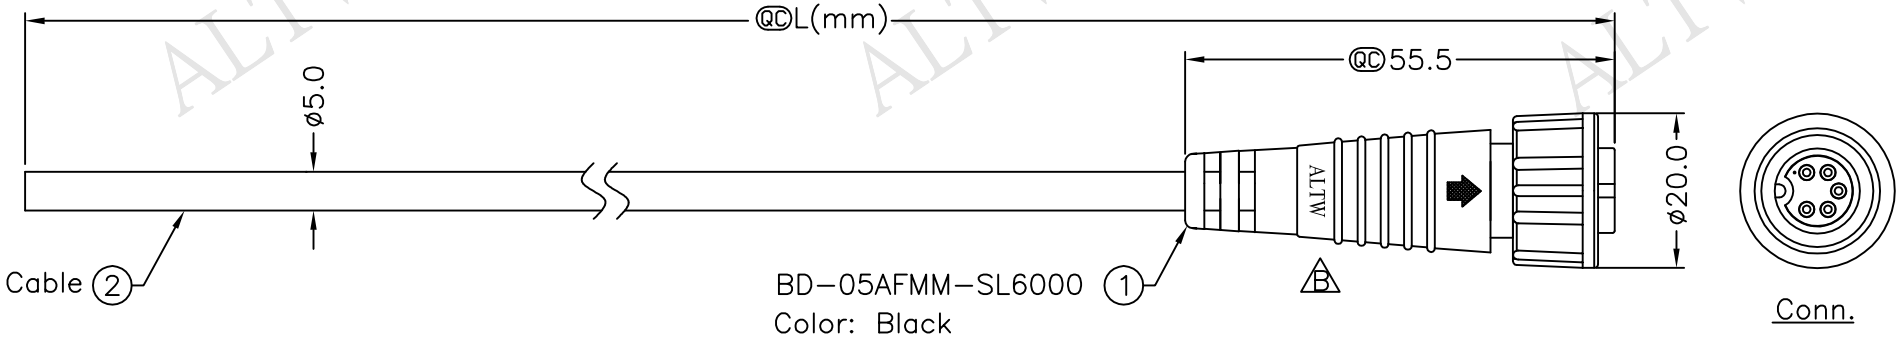

ALTW CONFIDENTIAL 2016.06.03 R&D DEPT.

ALTW DCC. DEPT. CONFIDENTIAL 2016.06.08 ISSUED

BD-05AFMM-SL6AXX

XX :01~99Meter
01 :01Meter
02 :02Meters
:
:
99 :99Meters
Cable Length(L):01~99Meters

Note:
* QC Important Dimension To Check.
* Waterproof Rate: IP66
* Housing: Nylon+GF, Black
* Pin: Copper Alloy, Gold Plated
* Cable: UL2464 24AWG*5C+D+Al/My, (UV Resistant), OD=5.0, Black
B * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm



Pin Assignments
Front View

Conn.	Wire Color
5	Green
4	White
3	Black
2	Blue
1	Brown

Pin Out

UNIT:mm	TITLE: Standard Cable Screw 5Pin F Conn M Pin		
TOLERANCE: ±0.5 mm	SCALE: Free	SHEET: 1 OF 1	
	REV: B	SIZE: A4	QC :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY: Ruru	DATE: 2016/06/03
DWG NO: BD-05AFMM-SL6AXX	CHECKED BY: Rita	DATE: 2016/06/03
CUSTOMER: ALTW	APPROVED BY: Lisa	DATE: 2016/06/03

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.