



5	6	7	8
REV.	ECN NO.	DATE	SIGN

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


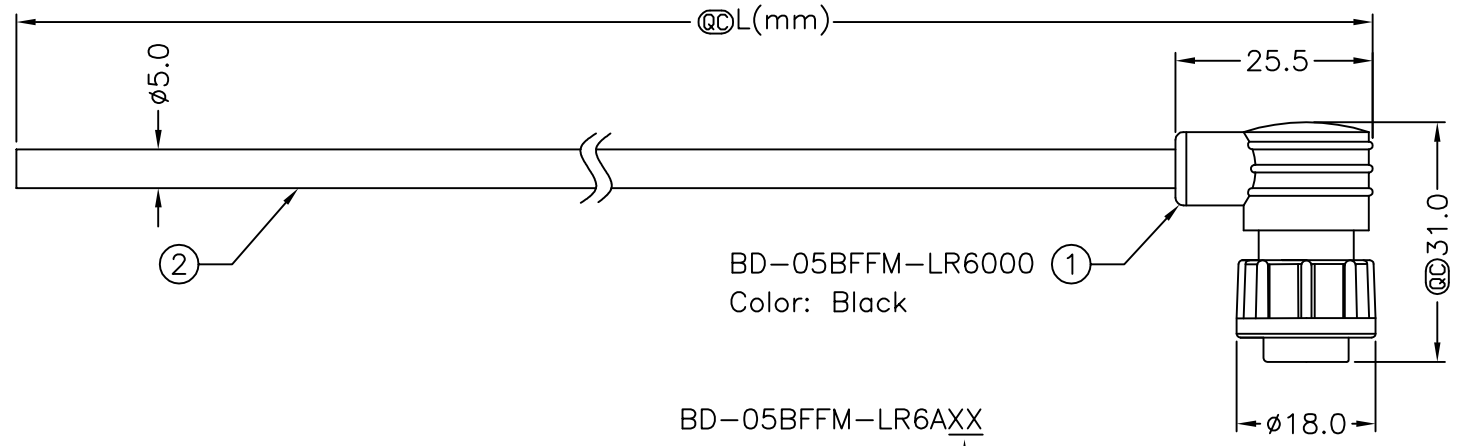


BD-05BFFM-LR6000
Color: Black


BD-05BFFM-LR6AXX
XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters



Conn.



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 24AWG*5C+D +Al/My, (UV Resistant) OD=5.0
 - * Cable Length Tolerance: 1M~10M±5%mm, 11M~99±500mm

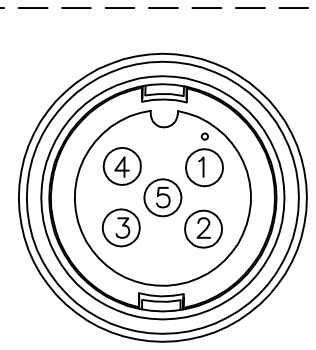

Pin Assignments
Front View

5	Green
4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Lock 5Pin F Conn F Pin	
SCALE	Free	SHEET 1 OF 1
REV.	A	SIZE A4
		@C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BD-05BFFM-LR6AXX
CUSTOMER	ALTW

DRAWN BY	Raul Paulo Canja
CHECKED BY	Ricky Valerio
APPROVED BY	Win

DATE	2007/01/26
DATE	2007/01/27
DATE	2007/01/27

1
F
E
D
C
B
A

2
3

4
5

6

7

8