


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5	6	7	8
REV.	ECN NO.	DATE	SIGN

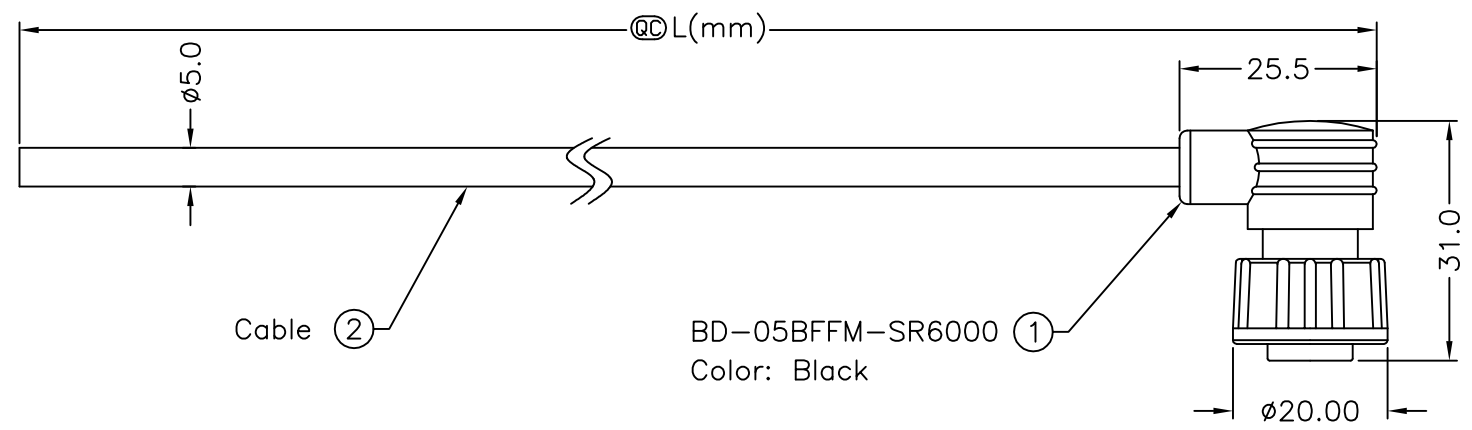


Cable (2)

BD-05BFFM-SR6000 (1)  
Color: Black


BD-05BFFM-SR6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ⋮
- 99:99Meters

Cable Length(L):01~99Meters



Conn.



Pin Assignments  
Front View

5	Green
4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
Pin Out	

Note:

- \* @C Important Dimension To Check.
- \* Waterproof Rate: IP66
- \* Housing: Black, Nylon+GF
- \* Pin: Copper Alloy, Gold Plated
- \* Cable: Black,UL2464 24AWG\*5C+D +Al/My, (UV Resistant) OD=5.0mm
- \* Cable Length Tolerance:1M~10M±5%mm,11M~99M±500mm.

UNIT:mm TOLERANCE ±0.5 mm	TITLE Standard Cable Screw 5Pin F Conn F Pin		<h1 style="margin: 0;">Amphenol LTW</h1> <p style="margin: 0;">安費諾亮泰企業股份有限公司</p>	ITEM NO	DRAWN BY Ferdinand Velarde	DATE 2007/03/13
	SCALE Free	SHEET 1 OF 1		DWG NO BD-05BFFM-SR6AXX	CHECKED BY Robert Dabu	DATE 2007/03/14
REV. A	SIZE A4	@C :Inspection Item	CUSTOMER ALTW	APPROVED BY Win	DATE 2007/03/14	