




5	6	7	8
REV. B	ECN NO. LEN1660197~200	DATE 2016/05/30	SIGN Ruru
			DESCRIPTION Change Logo & Note

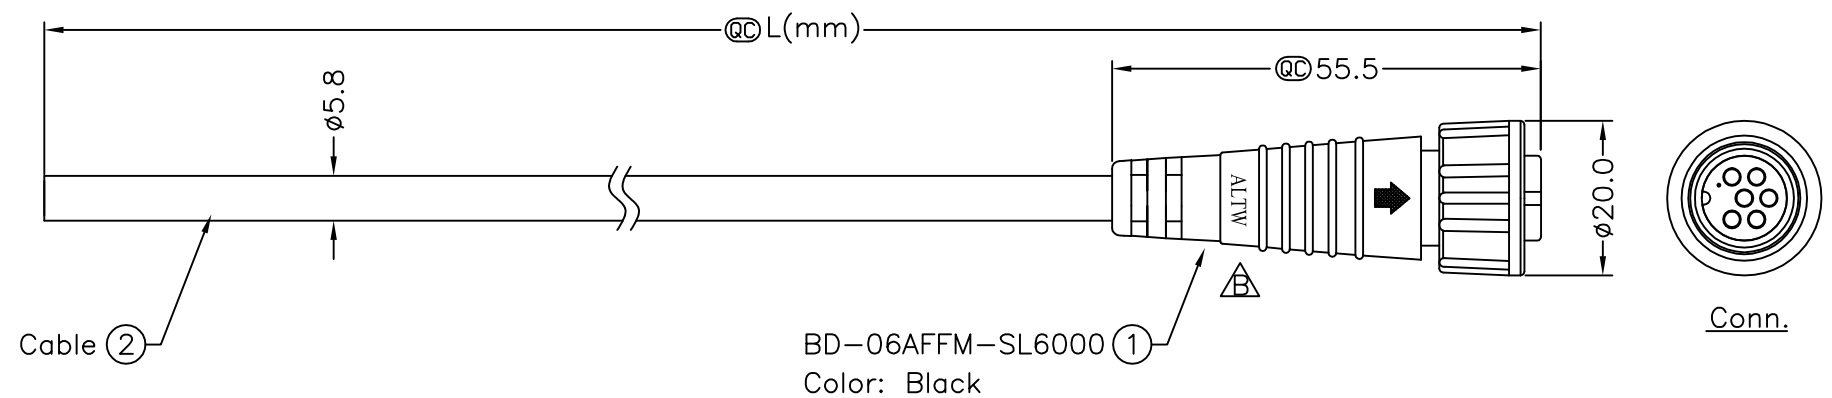

BD-06AFFM-SL6AXX
XX:01~99Meter
01:01Meter
02:02Meters
 :
 :
99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*6C+D+Al/My PVC Jacket (UV Resistant) OD=5.8, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



Pin Assignments
Front View

6	White
5	Red
4	Orange
3	Yellow
2	Green
1	Blue
Conn.	Wire Color
Pin Out	

UNIT:mm		TITLE	Standard	ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	Cable Screw 6Pin F Conn. F Pin	Amphenol LTW	DWG NO	Ruru	2016/05/30
		SCALE Free	安費諾亮泰企業股份有限公司	BD-06AFFM-SL6A <u>XX</u>	CHECKED BY	DATE
		SHEET 1 OF 1		CUSTOMER	Rita	2016/05/30
		REV. B		ALTW	APPROVED BY	DATE
		SIZE A4			Lisa	2016/05/30
		@C :Inspection Item				

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.