

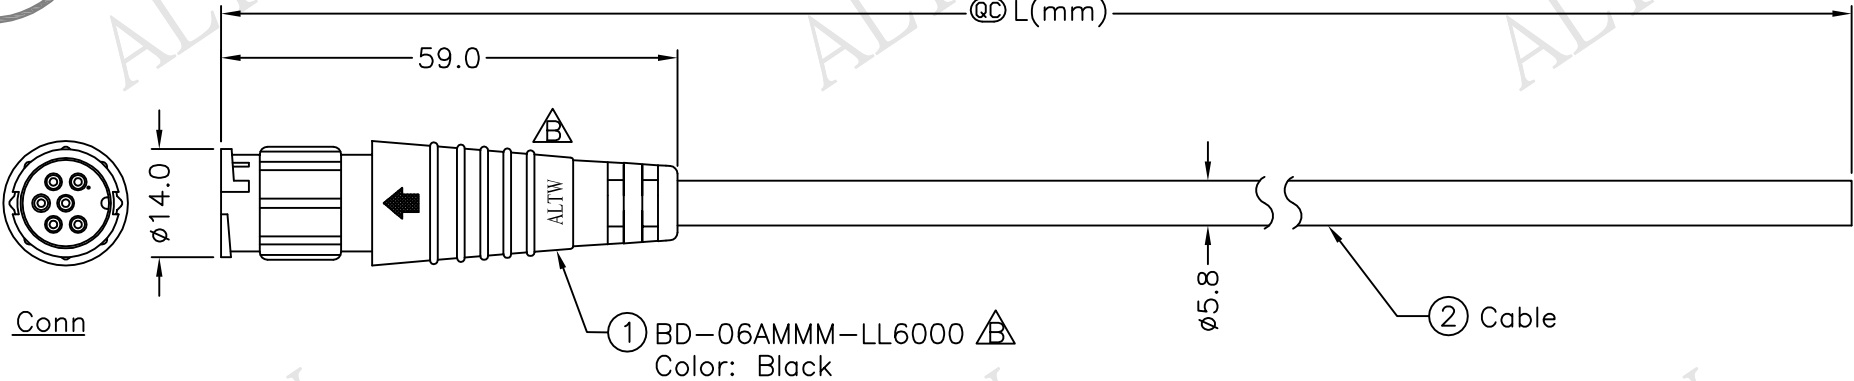


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31630169~172	2016/02/17	Ruru	Change Logo & Note &Title



① BD-06AMMM-LL6000  $\Delta$   
Color: Black




$\Delta$  BD-06AMMM-LL6AXX

XX:01~99Meter  
01:01Meter  
02:02Meters  
:  
:  
99:99Meters

Cable Length(L):01~99Meters

- Note:
- \*  $\Delta$ Important Dimension To Check.
  - \* Waterproof Rate: IP66
  - \* Connector: Nylon+GF, Black
  - \* Pin: Copper Alloy, Gold Plated
  - \* Cable: UL2464 24#\*6C+Drain+Al/My, (UV Resistant), OD=5.8mm, Black
  - \*  $\Delta$  Cable Length Tolerance: 01M:  $\pm$ 40mm  
02M~05M:  $\pm$ 60mm  
06M~10M:  $\pm$ 100mm  
11M~30M:  $\pm$ 200mm  
31M~99M:  $\pm$ 500mm



Pin Assignments  
Front View

6	White
5	Red
4	Orange
3	Yellow
2	Green
1	Blue
Conn	Wire Color
Pin Out	

UNIT:mm	
TOLERANCE	$\pm$ 0.5 mm

TITLE	
LOCK CABLE ASSEMBLY 180	
$\Delta$ 6PIN M CONN M PIN(5A)	
SCALE	1/1
SHEET	1 OF 1
REV.	B
SIZE	A4
$\Delta$ :Inspection Item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2016/02/17
DWG NO	CHECKED BY	DATE
BD-06AMMM-LL6AXX	Rita	2016/02/17
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016/02/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F  
E  
D  
C  
B  
A