



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8B0455~458	2008/10/02	Ivan	Update notes
D	LEN1610210~213	2016/01/08	Ruru	Change Logo & Note
E	LEN17A0034~037	2017/09/27	Ruru	Update View

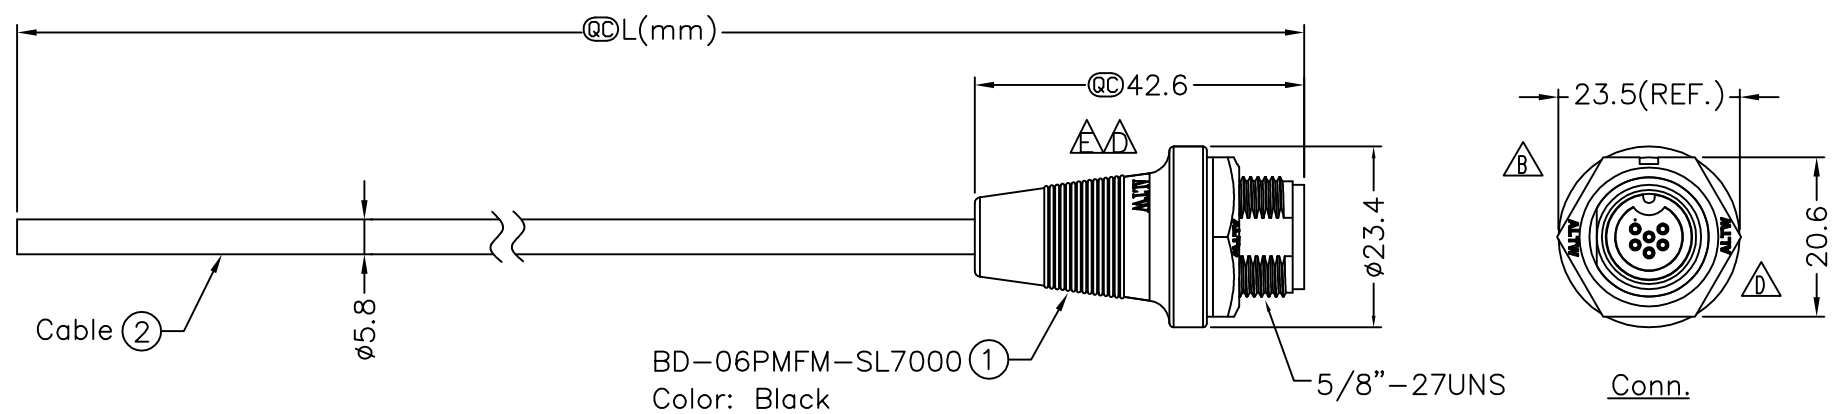

BD-06PMFM-SL7000 (1)  
Color: Black

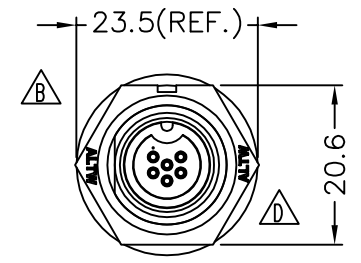

Conn.



6	White	白
5	Red	紅
4	Orange	橘
3	Yellow	黃
2	Green	綠
1	Blue	藍
Conn.	Wire Color	



BD-06PMFM-SL7AXX

XX:01~99Meter  
01:01Meter  
02:02Meters  
:  
99:99Meters  
Cable Length(L):01~99Meters

- Note:  $\triangle$
- \*  $\textcircled{C}$  Important Dimensions To Check.
  - \* Waterproof Rate: IP67
  - \* Housing: Black,Nylon+GF
  - \* Female Pin: Copper Alloy,Gold Plated
  - \* Gasket: Black,EPDM
  - \* Nut: Black,Nylon+GF
  - \* Cable: UL2464 24AWG\*4C+Drain+Al/My Black,PVC Jacket UV Resistant, OD=5.8
  - $\triangle$  \* Use With Waterproof Cap Or Dust Cap  
Panel Thickness Max: 2.5mm
  - $\triangle$  \* Use Without Waterproof Cap Or Dust Cap  
Panel Thickness Max: 3.5mm
  - $\triangle$  \* Cable Length Tolerance: 01M:  $\pm 40$ mm  
02M~05M:  $\pm 60$ mm  
06M~10M:  $\pm 100$ mm  
11M~30M:  $\pm 200$ mm  
31M~99M:  $\pm 500$ mm

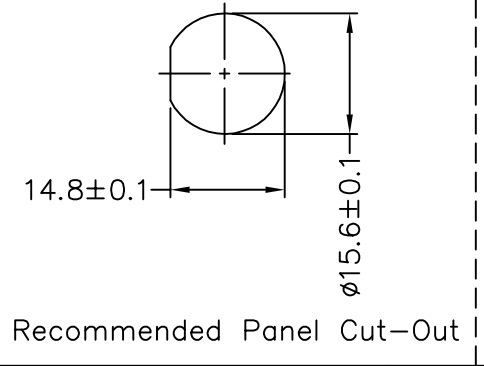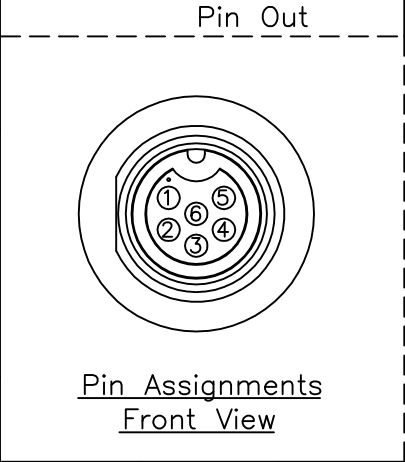

UNIT:mm		TITLE
TOLERANCE	$\pm 0.5$ mm	Standard,Cable Screw 6Pin M Conn. F Pin
SCALE	Free	SHEET 1 OF 1
REV.	E	SIZE A4
		$\textcircled{C}$ :Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2017/09/27
BD-06PMFM-SL7AXX	Rita	2017/09/27
ALTW	Max	2017/09/27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.