


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0384-387	2008/09/19	Shin	Add Note
C	LEN15A0196-199	2015/09/25	Vicky	Update Logo & Note
D	LEN1650399-402	2016/05/13	Ruru	Modify Logo Position

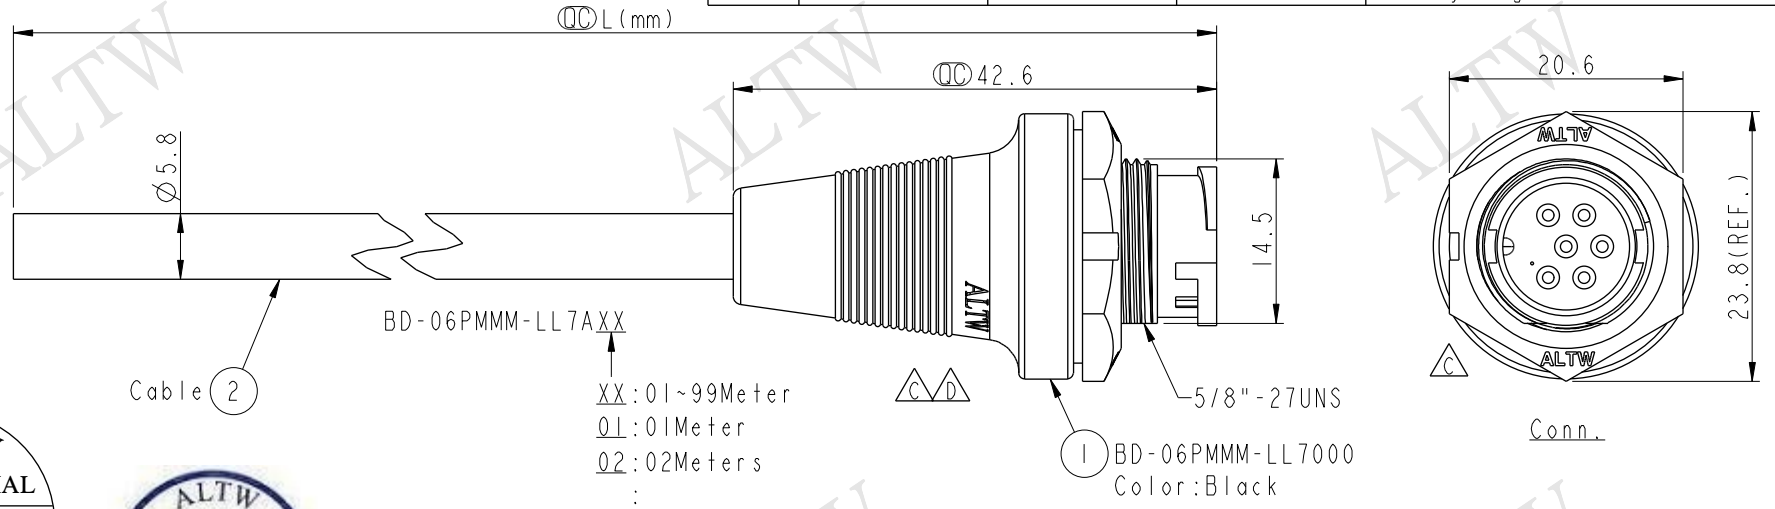


ALTW
CONFIDENTIAL
2016-05-13
R&D DEPT.

ALTW
DCC. DEPT.
CONFIDENTIAL
2016.05.23
ISSUED


BD-06PMMM-LL7AXX
XX: 01-99Meters
01: 01Meter
02: 02Meters
...
99: 99Meters
Cable Length(L): 01-99Meters

1 BD-06PMMM-LL7000
Color: Black

- Note:
- * CC Important Dimensions To Check
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24#*6C+D+Al/My,UV, PVC Jacket, Black, OD=5.8mm
- $\triangle A$ * Use with waterproof cap or dust cap
Panel Thickness Max: 2.5mm
 - $\triangle B$ * Use without waterproof cap or dust cap
Panel Thickness Max: 3.5mm
 - $\triangle C$ * Cable Length Tolerance: 1M: ± 40 mm
2M~5M: ± 60 mm
6M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

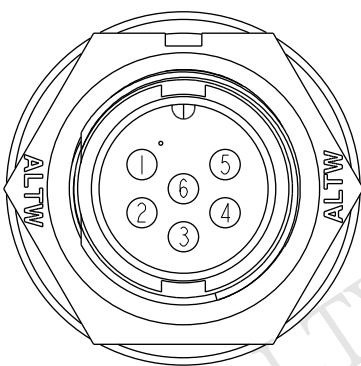

Pin Assignments
Front View

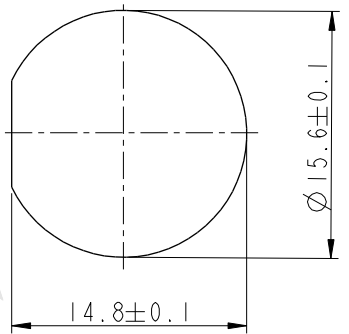

Recommended Panel Cut-Out

6	White	白
5	Red	紅
4	Orange	橙
3	Yellow	黃
2	Green	綠
1	Blue	藍
Conn.	Wire Color	
	Pin Out	

UNIT:mm ± 0.5 mm

TITLE
Standard
Cable Lock 6Pin M Conn M Pin

SCALE 3:2 SIZE A4 SHEET 1 OF 1

REV. D WC-REV. A.1 CC : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
BD-06PMMM-LL7AXX	Ruru	2016-05-13
DWG NO	CHECKED BY	DATE
BD-06PMMM-LL7AXX	Rita	2016-05-13
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016-05-13

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.