






THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5	6	7	8
REV.	ECN NO.	DATE	SIGN

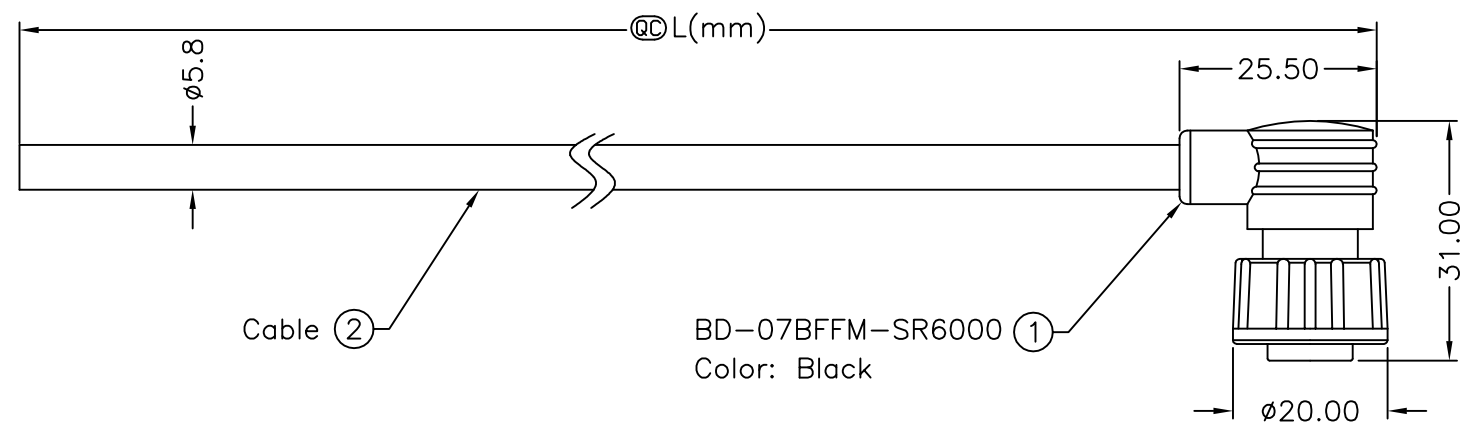

BD-07BFFM-SR6000 (1)
Color: Black

BD-07BFFM-SR6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

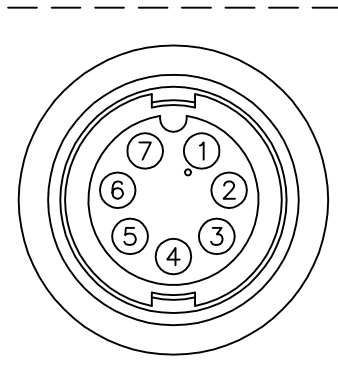

Pin Assignments
Front View

7	White
6	Green
5	Brown
4	Red
3	Yellow
2	Orange
1	Blue
Conn.	Wire Color
Pin Out	

- Note:
- * @D Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 24#*7C+D+Al/My (UV Resistant) OD=5.8mm
 - * Cable Length Tolerance: 1M~10M±5%mm, 11M~99M±500mm.

UNIT:mm	TITLE Standard Cable Screw 7Pin F Conn F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ferdinand Velarde	DATE 2007/03/13
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1		DWG NO BD-07BFFM-SR6AXX	CHECKED BY Robert Dabu	DATE 2007/03/14
	REV. A	SIZE A4	@C : Inspection Item	CUSTOMER ALTW	APPROVED BY Win	DATE 2007/03/14