



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LENI590373~76	2015/09/11	Ruru	Change Logo & Note
C	LE31630175~78	2016/02/24	Ruru	Update Bubble Ball

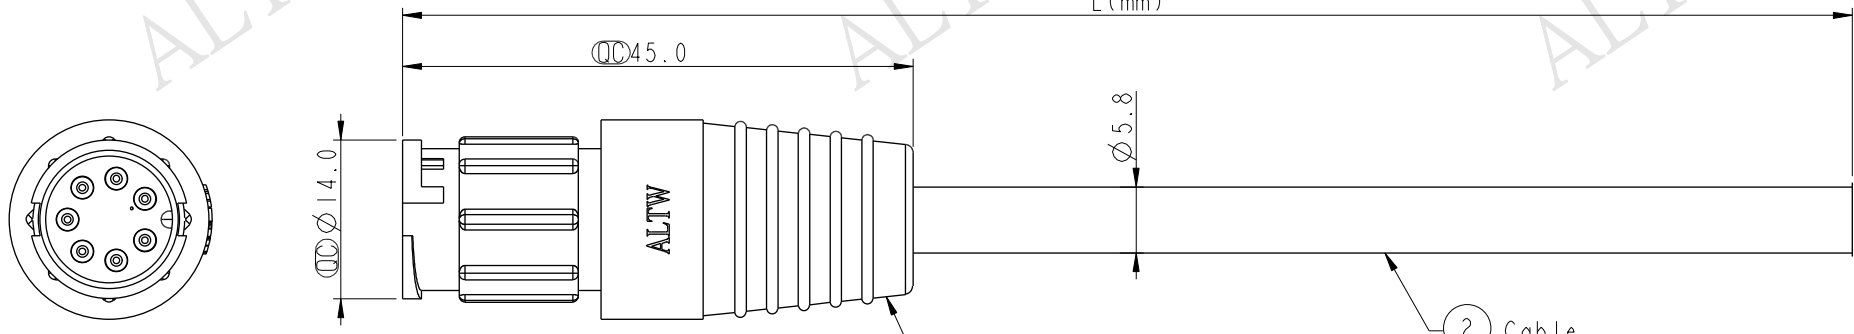

ALTW
 CONFIDENTIAL
 2016-02-24
 R&D DEPT.

ALTW
 DCC. DEPT.
 CONFIDENTIAL
 2016.03.18
 ISSUED



Pin	Wire Color
7	White
6	Green
5	Brown
4	Red
3	Yellow
2	Orange
1	Blue

Conn.1 Wire Color
Pin Out

△ BD-07BMMM-LL7AXX

XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 ...
 99: 99Meters

Cable Length(L): 01~99Meters

Note:

- * \varnothing Important Dimension To Check.
- * Waterproof Rate: IP67
- * Connector: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 24AWG*7C+Drain+Al/My, (UV Resistant) OD=5.8mm, Black
- △ * Cable Length Tolerance:
 - 01M: ±40mm
 - 02M~05M: ±60mm
 - 06M~10M: ±100mm
 - 11M~30M: ±200mm
 - 31M~99M: ±500mm

UNIT:mm TOLERANCE $\pm 0.5mm$	TITLE BD-07BMMM-L180 to Cable		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO.	DRAWN BY Ruru	DATE 2016-02-24
	SCALE 3:2	SIZE A4			SHEET 1 OF 1	DWG NO. BD-07BMMM-LL7AXX	CHECKED BY Rita
	REV. C	WC-REV. A.1	\varnothing : Inspection item	CUSTOMER ALTW	APPROVED BY Lion	DATE 2016-02-24	