



5	6	7	8
REV. B	ECN NO. LE31660149~153	DATE 2016/05/31	SIGN Ruru
			DESCRIPTION Change Logo & Note

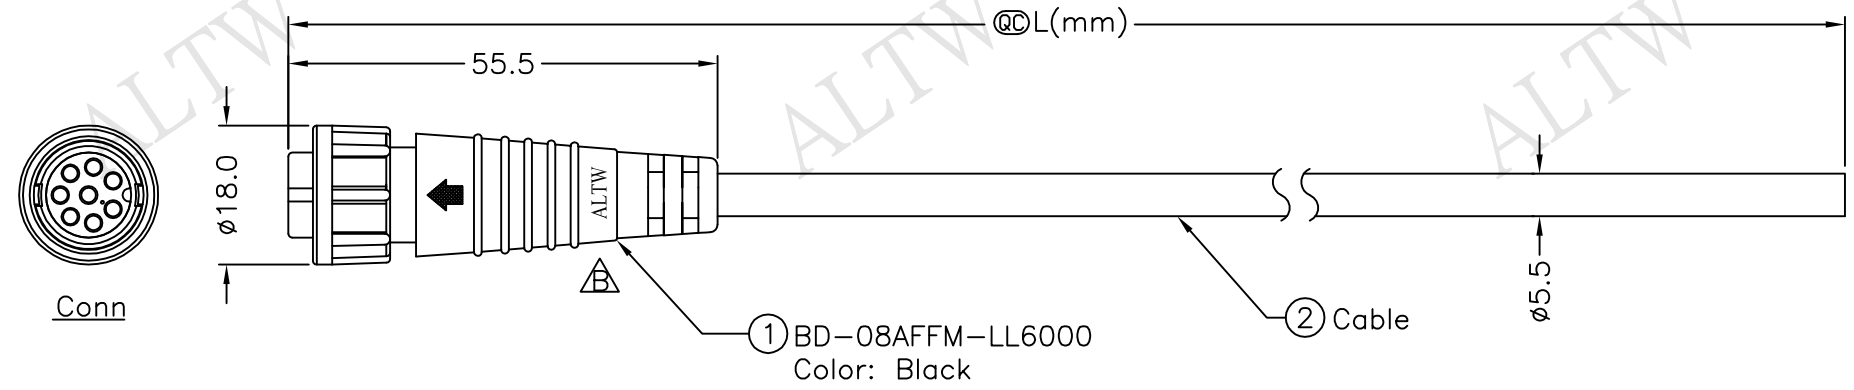


BD-08AFFM-LL6AXX \triangle

↑

XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 :
 99:99Meters

Cable Length(L):01~99Meters

- Note:
- * \textcircled{D} Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24#*8C+Drain+Al/My, (UV Resistant), OD=5.5mm, Black
 - * \triangle Cable Length Tolerance: 01M: ± 40 mm
 02M~05M: ± 60 mm
 06M~10M: ± 100 mm
 11M~30M: ± 200 mm
 31M~99M: ± 500 mm



Pin Assignments
Front View

8	Green
7	Yellow
6	Orange
5	Red
4	Blue
3	White
2	Brown
1	Black
Conn	Wire Color
Pin Out	

UNIT:mm		TITLE	LTWBD-08AFFM-L180 To Cable
TOLERANCE	± 0.5 mm	SCALE	1/1
REV.	B	SHEET	1 OF 1
SIZE	A4	\textcircled{C}	:Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO BD-08AFFM-LL6AXX	Ruru	2016/05/31
CUSTOMER	CHECKED BY	DATE
ALTW	Rita	2016/05/31
	APPROVED BY	DATE
	Lisa	2016/05/31

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.