




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN12C0020	2012/11/29	Vicky	Modify SR View & Note.
C	LEN1610366~370	2016/01/11	Ruru	Change Logo

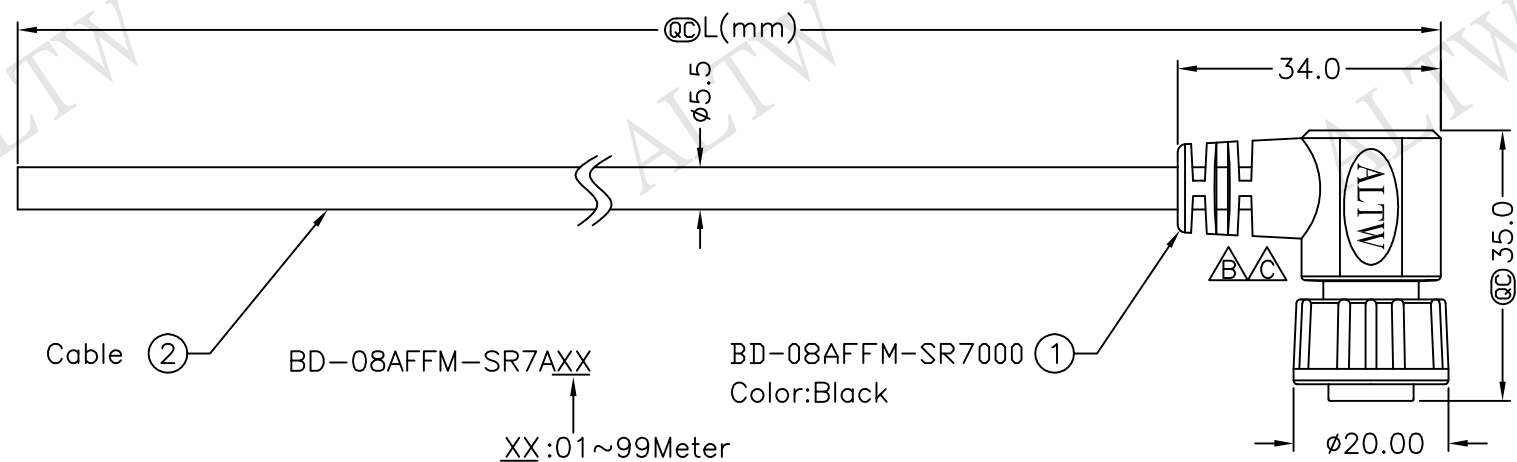


XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters

Cable Length(L):01~99Meters




Conn.



Pin Assignments
Front View

8	Green	綠
7	Yellow	黃
6	Orange	橘
5	Red	紅
4	Blue	藍
3	White	白
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
	Pin Out	



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate:IP67.
 - * Housing:Nylon+GF,Black.
 - * Female Pin:Copper Alloy,Gold Plated.
 - * Cable:UL2464 24AWG*8C+Drain+Al/My,Black, PVC Jacket UV Resistant, OD=5.5
 - * Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

UNIT:mm		TITLE	Standard Cable Screw 8Pin F Conn F Pin		ITEM NO	BD-08AFFM-SR7AXX	DRAWN BY	Ruru	DATE	2016/01/11
TOLERANCE	±0.5 mm	SCALE	Free	SHEET 1 OF 1	DWG NO	BD-08AFFM-SR7AXX	CHECKED BY	Rita	DATE	2016/01/11
		REV.	C	SIZE A4	CUSTOMER	ALTW	APPROVED BY	Lisa	DATE	2016/01/11
				@C :Inspection Item	Amphenol LTW 安費諾亮泰企業股份有限公司					

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.