



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-0C0160~163	2010/12/06	jordan_wu	Add LTWBD-08AMMM-LL6000
C	LEN1630364~367	2016/02/17	Ruru	Change Logo




F
E
D
C
B
A

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

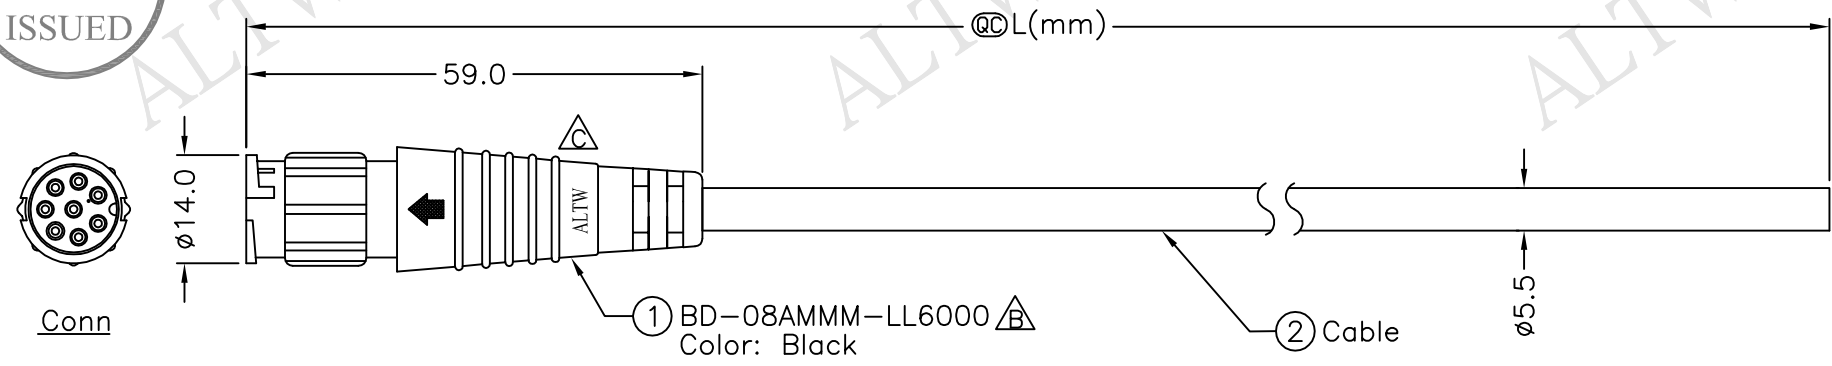

① BD-08AMMM-LL6000 Δ
Color: Black

② Cable



BD-08AMMM-LL6AXX

XX:01~99Meter
01:01Meter
02:02Meters
⋮
99:99Meters

Cable Length(L):01~99Meters



Pin Assignments
Front View

8	Green	綠
7	Yellow	黃
6	Orange	橘
5	Red	紅
4	Blue	藍
3	White	白
2	Brown	棕
1	Black	黑
Conn	Wire Color	Pin Out

Note:

- * @@Important Dimension To Check.
- * Waterproof Rate: IP66.
- * Connector: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated.
- * Cable: UL2464 24#*8C+D+A,OD=5.5mm
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm	TITLE BD-08AMMM-LL6AXX		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2016/02/17
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1		DWG NO BD-08AMMM-LL6AXX	CHECKED BY Rita	DATE 2016/02/17
REV. C	SIZE A4	QC :Inspection Item	CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/02/17	8 FMWIG02-01-01A2

1 2 3 4 5 6 7 8