



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5	6	7	8
REV.	ECN NO.	DATE	SIGN

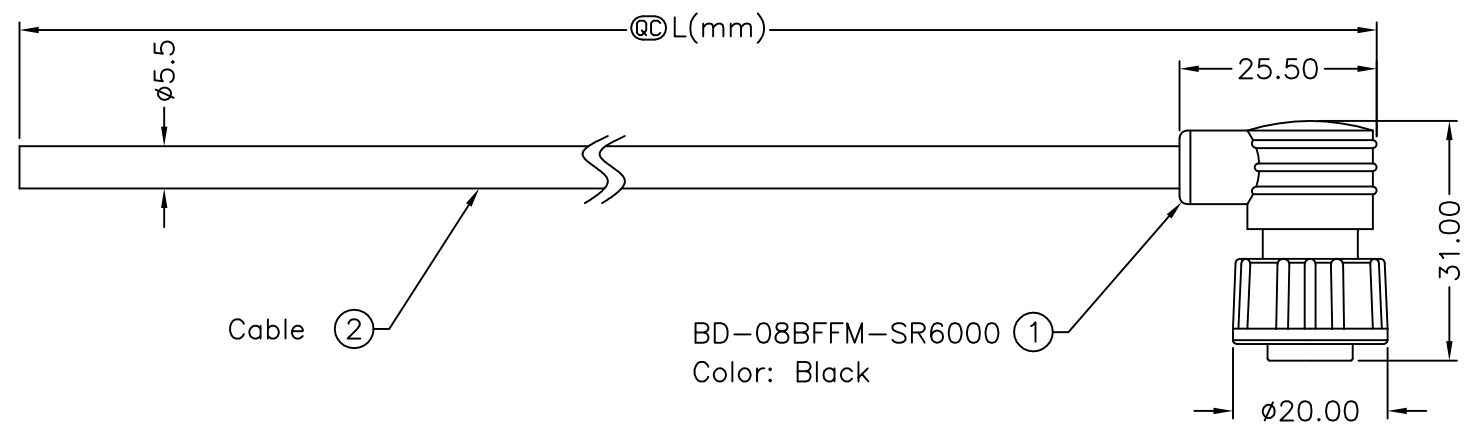


Cable ②



BD-08BFFM-SR6000 ①
Color: Black



BD-08BFFM-SR6AXX
 ↑
 XX :01~99Meter
 01 :01Meter
 02 :02Meters
 :
 :
 :
 99 :99Meters
 Cable Length(L):01~99Meters



Conn.

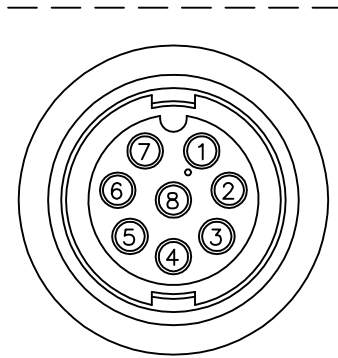

Pin Assignments
Front View

8	Green
7	Yellow
6	Orange
5	Red
4	Blue
3	White
2	Brown
1	Black
Conn.	Wire Color
Pin Out	

- Note:
- * @@ Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG*8C+Drain+Al/My Black,PVC Jacket UV Resistant, OD=5.5
 - * Cable Length Tolerance:1M~10M±5%mm,11M~99M±500mm.

UNIT:mm	TITLE Standard Cable Screw 8Pin F Conn F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ferdinand Velarde	DATE 2007/03/13
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1		DWG NO BD-08BFFM-SR6AXX	CHECKED BY Robert Dabu	DATE 2007/03/14
	REV. A	SIZE A4	@@ :Inspection Item	CUSTOMER ALTW	APPROVED BY Win	DATE 2007/03/14