





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1610375~378	2016/01/12	Ruru	Change Logo & Note

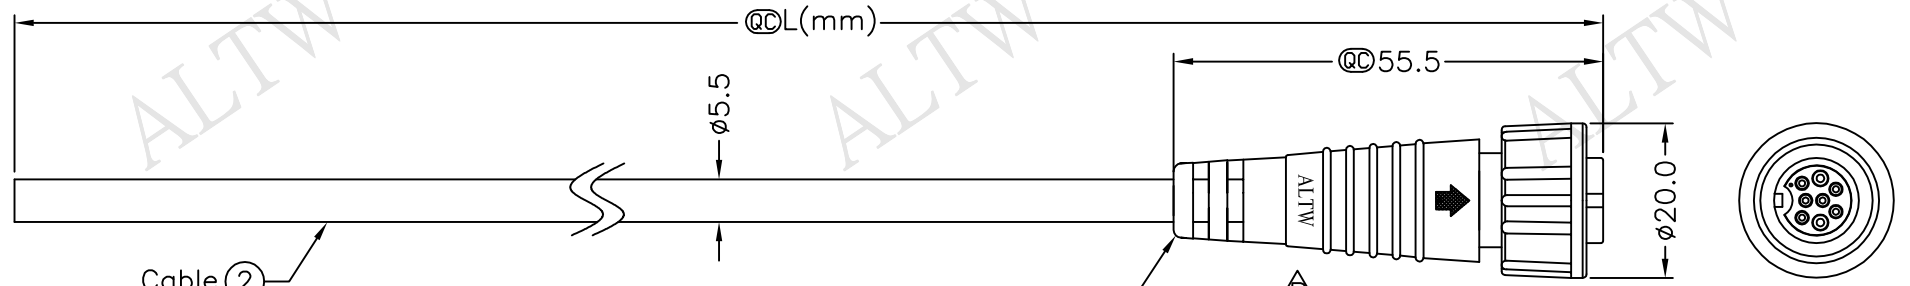

BDU-08AFMM-SL6AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

BDU-08AFMM-SL6000 ①
 Color: Black

Conn.



Pin Assignments
Front View

8	Red	26AWG
7	Pink	26AWG
6	Gray	26AWG
5	Blue	24AWG
4	Green	26AWG
3	White	26AWG
2	Brown	24AWG
1	Yellow	26AWG
Conn.	Wire Color	
	Pin Out	

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Connector: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 (24AWG*2C+26AWG*6C)+Drain+Al/My PVC Jacket UV Resistant, OD=5.5mm
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

UNIT:mm		TITLE	Standard	ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	Cable Screw 8Pin F Conn M Pin			Ruru	2016/01/12
		SCALE	Free	DWG NO	CHECKED BY	DATE
		SHEET	1 OF 1	BDU-08AFMM-SL6AXX	Rita	2016/01/12
		REV.	B	CUSTOMER	APPROVED BY	DATE
		SIZE	A4	ALTW	Lisa	2016/01/12
		@C	:Inspection Item			

Amphenol LTW
 安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.