


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8B0584~587	2008/10/30	Ivan	Update Note
D	LEN1610334~337	2016/01/19	Ruru	Change Logo & Note
E	LEN1650431~434	2016/05/13	Ruru	Change View





BDU-08PMFM-LL7AXX

BDU-08PMFM-LL7000
Color: Black

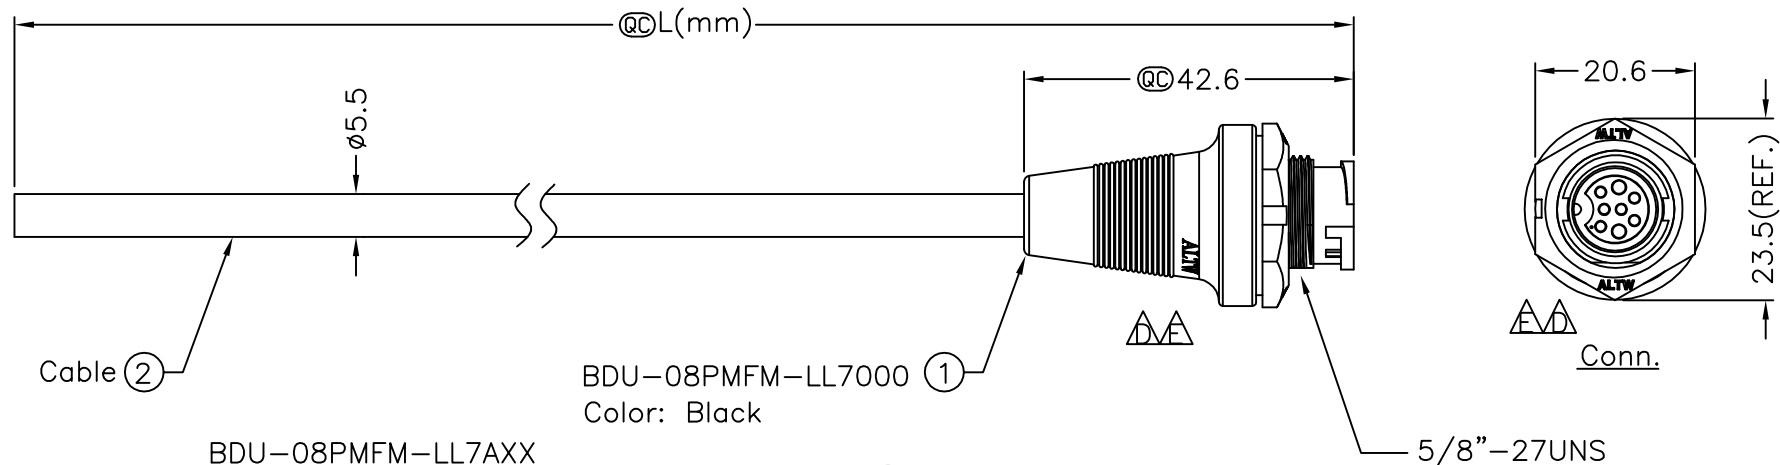


XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters



Pin Assignments
Front View

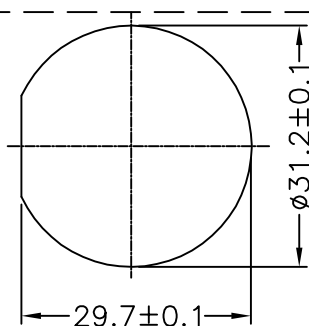

Recommended Panel Cut-Out

Red (26AWG)	紅	8
Pink (26AWG)	粉紅	7
Gray (26AWG)	灰	6
Blue (24AWG)	藍	5
Yellow (26AWG)	黃	4
Green (26AWG)	綠	3
Brown (24AWG)	棕	2
White (26AWG)	白	1
Wire Color		Conn.

Pin Out

Note:

- * @C Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 26AWG*6C+24AWG*2C+Drain+Al/My Black, PVC Jacket UV Resistant OD=5.5mm
- * Use with waterproof cap or dust cap
Panel Thickness Max: 2.5mm
- * Use without waterproof cap or dust cap
Panel Thickness Max: 3.5mm
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5

TITLE	Standard	
	Cable Lock 8Pin M Conn. F Pin	
SCALE	Free	SHEET 1 OF 1
REV. E	SIZE A4	@C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2016/05/13
DWG NO	CHECKED BY	DATE
BDU-08PMFM-LL7AXX	Rita	2016/05/13
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016/05/13

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.