REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1230617	2012/03/30	Ruru	Change Note
D	LEN1530186	2014/12/19	Ruru	Change Logo
E	C190273	2019/02/25	Ruru	Modify Note



PIN ASSIGNMENTS
FRONT VIEW

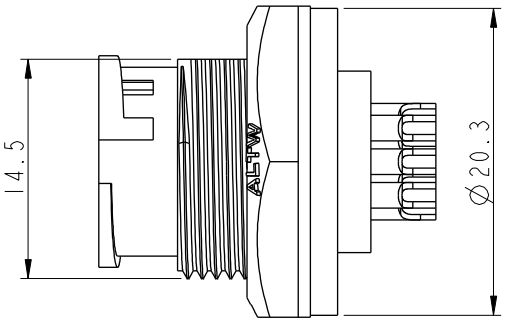

ALTW
CONFIDENTIAL
2019-02-25
R&D DEPT.

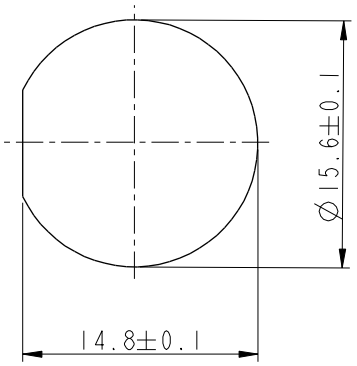

Recommended Panel Cut-out

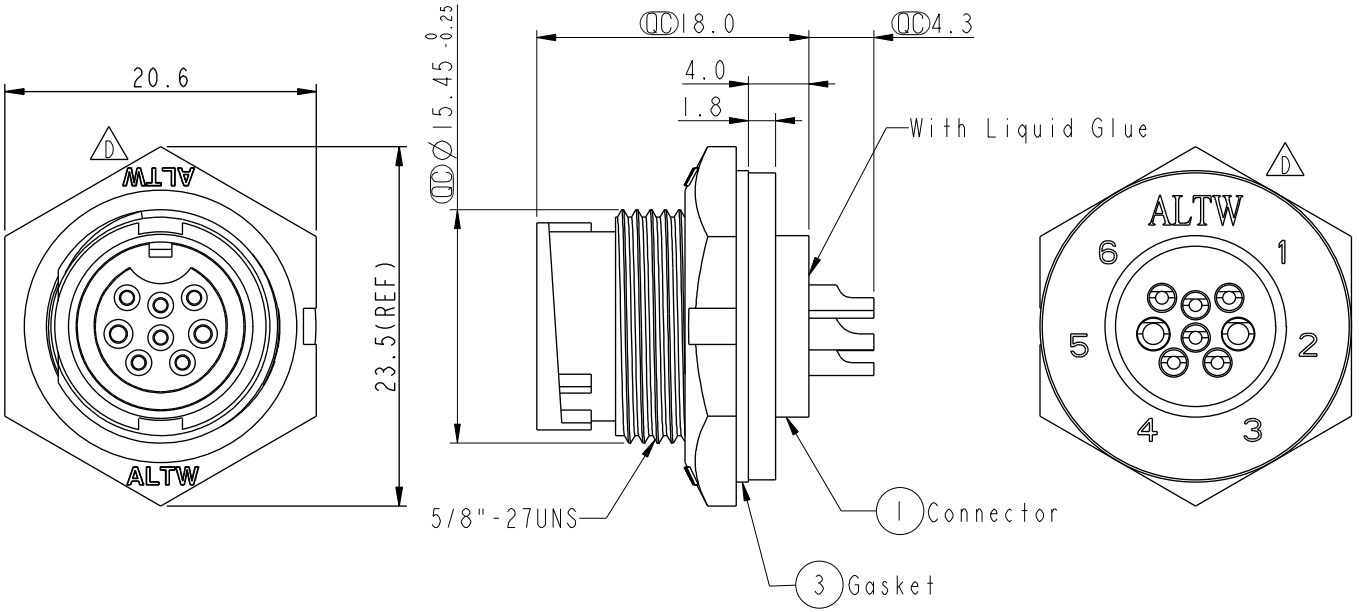

Note: E
* QC Important Dimension To Check.
* Waterproof Rate: IP67, Unmated
* Housing: Thermoplastic, Black
* Pin: Copper Alloy, Gold Plated
C * Nut: Thermoplastic, Black
* Gasket: Rubber, Black
* Liquid Glue: Clear
B * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 3.0mm
B * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.5mm
* Gasket and Nut are packed separately in PE bags.

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: Standard,Panel Lock 8Pin M Conn F Pin
SCALE: 2:1 | SIZE: A4 | SHEET: 1 OF 1
REV.: E | WC-REV.: A.4 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO: BDU-08PMFS-LC7001	DRAWN BY: Ruru	DATE: 2019-02-25
DWG NO: BDU-08PMFS-LC7001	CHECKED BY: Rita	DATE: 2019-02-25
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2019-02-25

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.