





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-790183	2007/09/13	WUFEI	Changed NUT
D	LEN-920142~45	2008/10/06	Li Xiu Zhi	Change Front View
E	LEN1710125~28	2017/01/17	Ruru	Change Logo

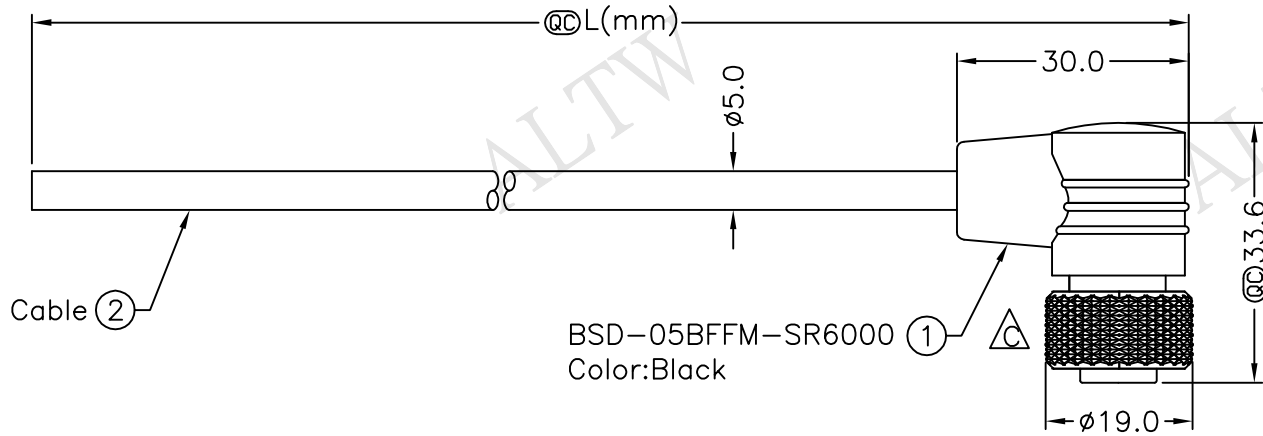


BSD-05BFFM-SR6AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters



Conn.

- Note:
- \* @C Important Dimension.
  - \* Waterproof Rate: IP66
  - \* Housing: Black, Nylon+GF
  - \* Female Pin: Copper Alloy, Gold Plated
  - \* Cable: Black, UL2464 24AWG\*5C+D+Al.My. +Al/My, (UV Resistant) OD=5.0mm
  - \* Cable Length Tolerance: 01M:40mm  
 02M~05M:60mm  
 06M~10M:100mm  
 11M~30M:200mm  
 31M~99M:500mm

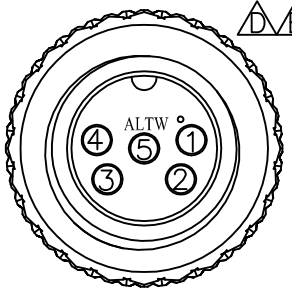

Pin Assignments Front View

Shield	Drain	地線
5	Green	綠
4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Screw 5Pin F Conn. F Pin	
SCALE	Free	SHEET 1 OF 1
REV.	E	SIZE A4
		QC : Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BSD-05BFFM-SR6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Max

DATE	2017/01/17
DATE	2017/01/17
DATE	2017/01/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8