




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-790199	2007/09/13	WUFEI	Change Nut
C	LEN-920162~65	2008/10/07	Li Xiu Zhi	Change View
D	LEN1710084~87	2017/01/17	Ruru	Change Logo

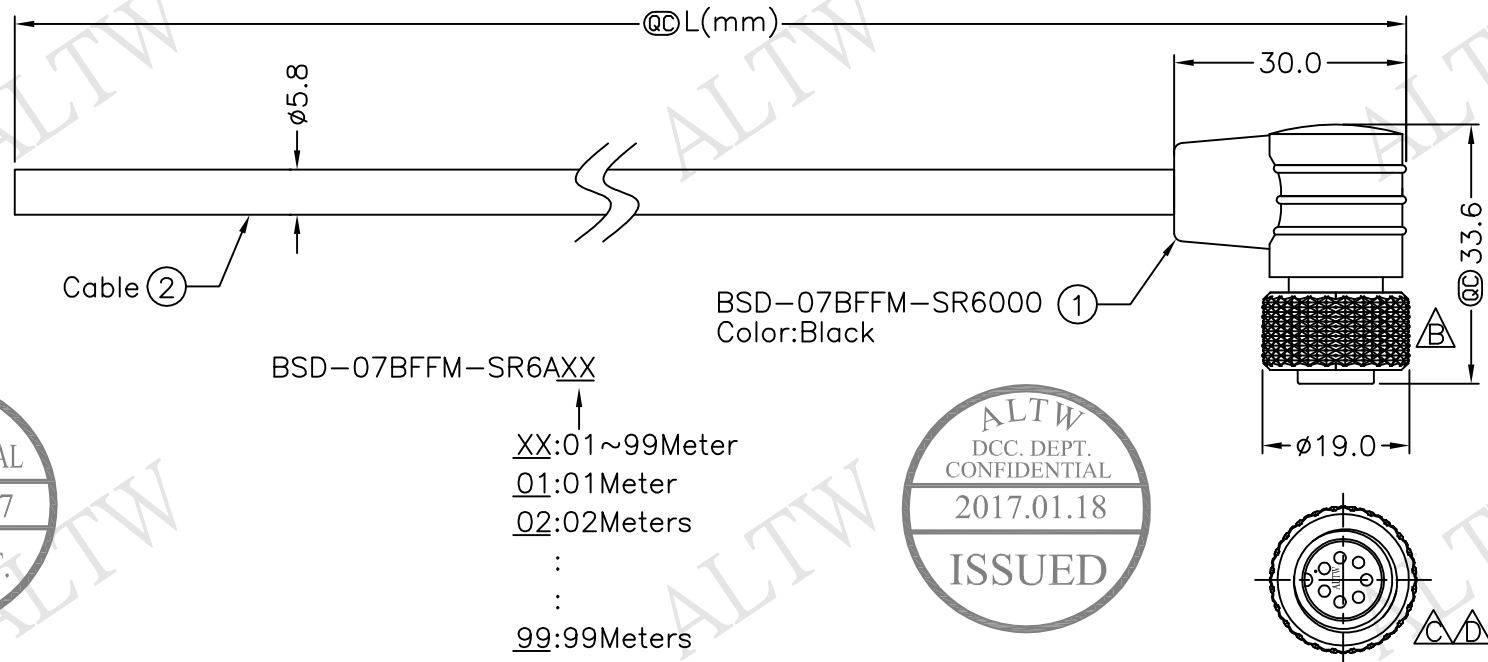

BSD-07BFFM-SR6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

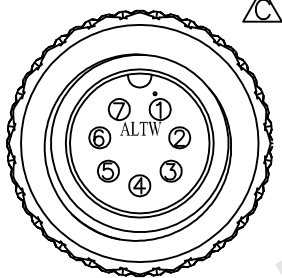

Shield	Drain	地線
7	White	白
6	Green	綠
5	Brown	棕
4	Red	紅
3	Yellow	黃
2	Orange	桔
1	Blue	藍
Conn.	Wire Color	

Pin Out

Note:
 * @@ Important Dimension To Check.
 * Waterproof Rate: IP66
 * Housing: Black, Nylon+GF
 * Pin: Copper Alloy, Gold Plated
 * Cable: Black, UL2464 24#*7C+D+Al/My (UV Resistant) OD=5.8mm
 * Cable Length Tolerance: 01M:40mm
 02M~05M:60mm
 06M~10M:100mm
 11M~30M:200mm
 31M~99M:500mm

UNIT:mm		TITLE
TOLERANCE		Standard, Cable Screw 7Pin F Conn F Pin
±0.5 mm	SCALE Free	SHEET 1 OF 1
	REV. D	SIZE A4
		QC : Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2017/01/17
DWG NO	CHECKED BY	DATE
BSD-07BFFM-SR6AXX	Rita	2017/01/17
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2017/01/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1 2 3 4 5 6 7 8

F

E

D

C

B

A