

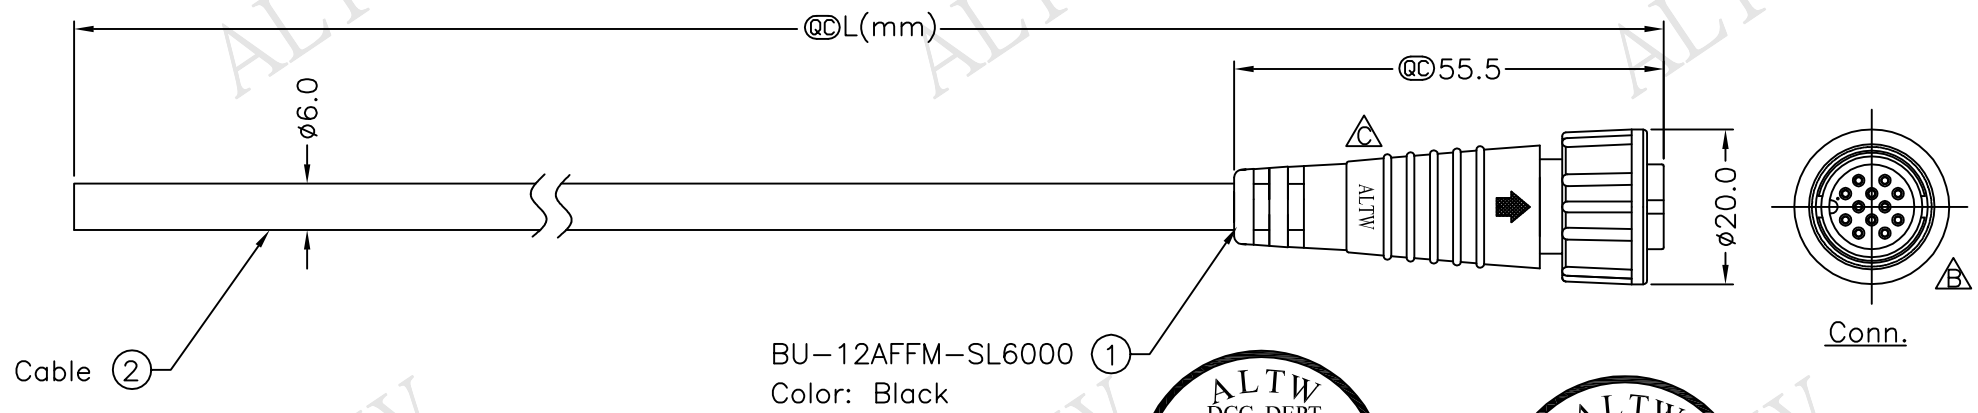


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0658~661	2010/11/26	Ivan	Change View
C	LEN15C0432~435	2015/12/10	Ruru	Change Logo

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



BU-12AFFM-SL6000
Color: Black



Pin Assignments
Front View

Light Green	淺綠	12
Purple	紫	11
Orange	橙	10
Black	黑	9
Red	紅	8
Pink	粉紅	7
Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out		

BU-12AFFM-SL6AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 26AWG*12C+Drain+Al/My PVC Jacket UV Resistant, OD=6.0, Black
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

UNIT:mm		TITLE	Standard
TOLERANCE	±0.5 mm	Cable Screw 12Pin F Conn. F Pin	
SCALE	Free	SHEET	1 OF 1
REV.	C	SIZE	A4
		@C	:Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
ALTW	Ruru	2015/12/14
	Rita	2015/12/14
	Lisa	2015/12/14