

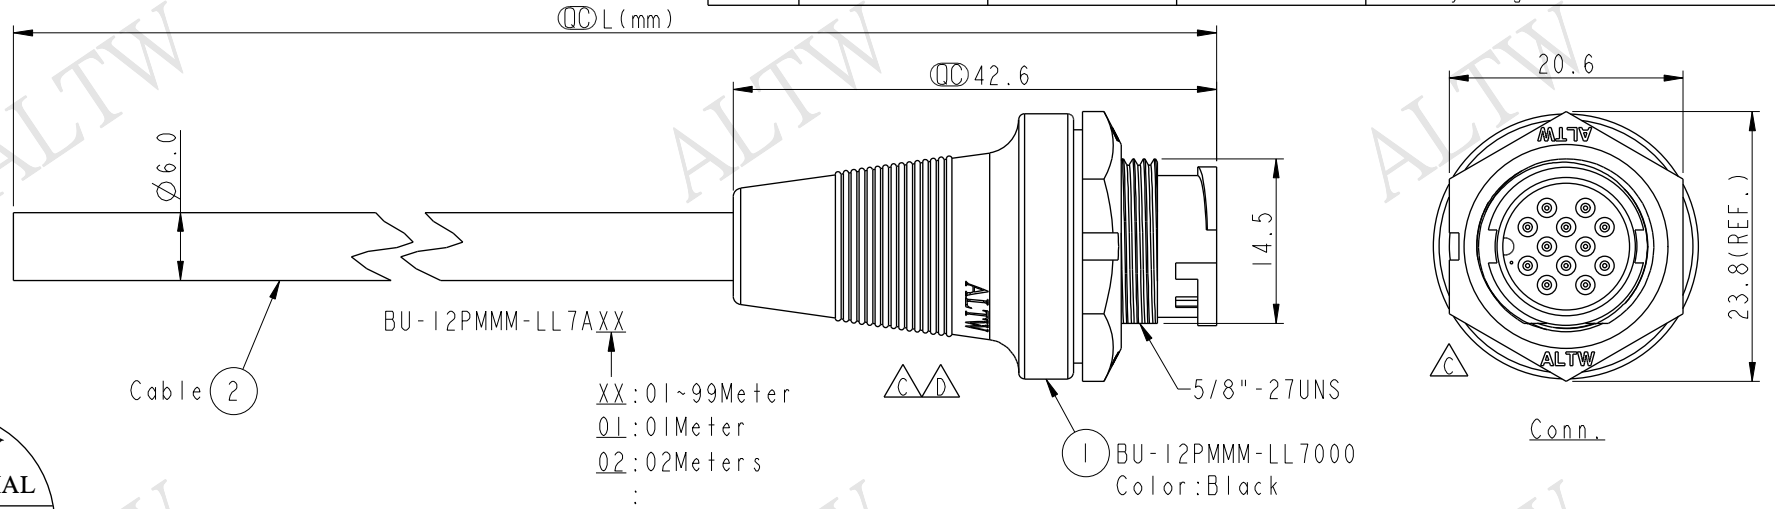



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0411-414	2015/09/22	Shin	Add Note
C	LEN1590291-297	2015/09/07	Vicky	Update Logo & Note
D	LEN1650559-565	2016/05/17	Ruru	Modify Logo Position

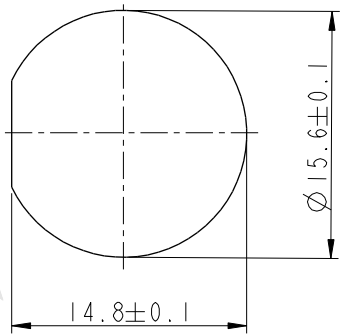

BU-12PMMM-LL7AXX
 XX: 01-99Meters
 01: 01Meter
 02: 02Meters
 ...
 99: 99Meters
 Cable Length(L): 01-99Meters

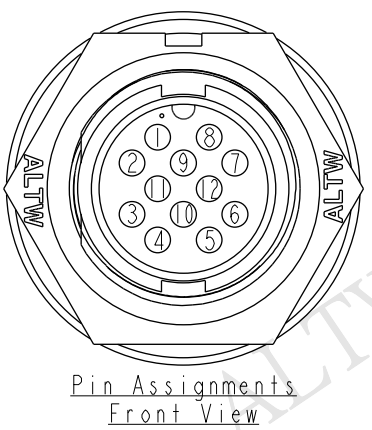

12	Light Green	淺綠
11	Purple	紫
10	Orange	橙
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

Note:
 * CC Important Dimensions To Check
 * Waterproof Rate: IP67
 * Housing: Nylon+GF, Black
 * Male Pin: Copper Alloy, Gold Plated
 * Cable: UL2464 26#*12C+D+Al/My,UV, PVC Jacket, Black, OD=6.0mm
 A * Use with waterproof cap or dust cap
 Panel Thickness Max: 2.5mm
 B * Use without waterproof cap or dust cap
 Panel Thickness Max: 3.5mm
 C * Cable Length Tolerance: 1M: ± 40 mm
 2M~5M: ± 60 mm
 6M~10M: ± 100 mm
 11M~30M: ± 200 mm
 31M~99M: ± 500 mm

UNIT:mm
 TOLERANCE
 ± 0.5 mm

TITLE
 Standard
 Cable Lock 12Pin M Conn M Pin
 SCALE 3:2 SIZE A4 SHEET 1 OF 1
 REV. D WC-REV. A.1 CC : Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO BU-12PMMM-LL7AXX	Ruru	2016-05-17
CUSTOMER	CHECKED BY	DATE
ALTW	Rita	2016-05-17
	APPROVED BY	DATE
	Lisa	2016-05-17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.