



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1650104~107	2016/05/04	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

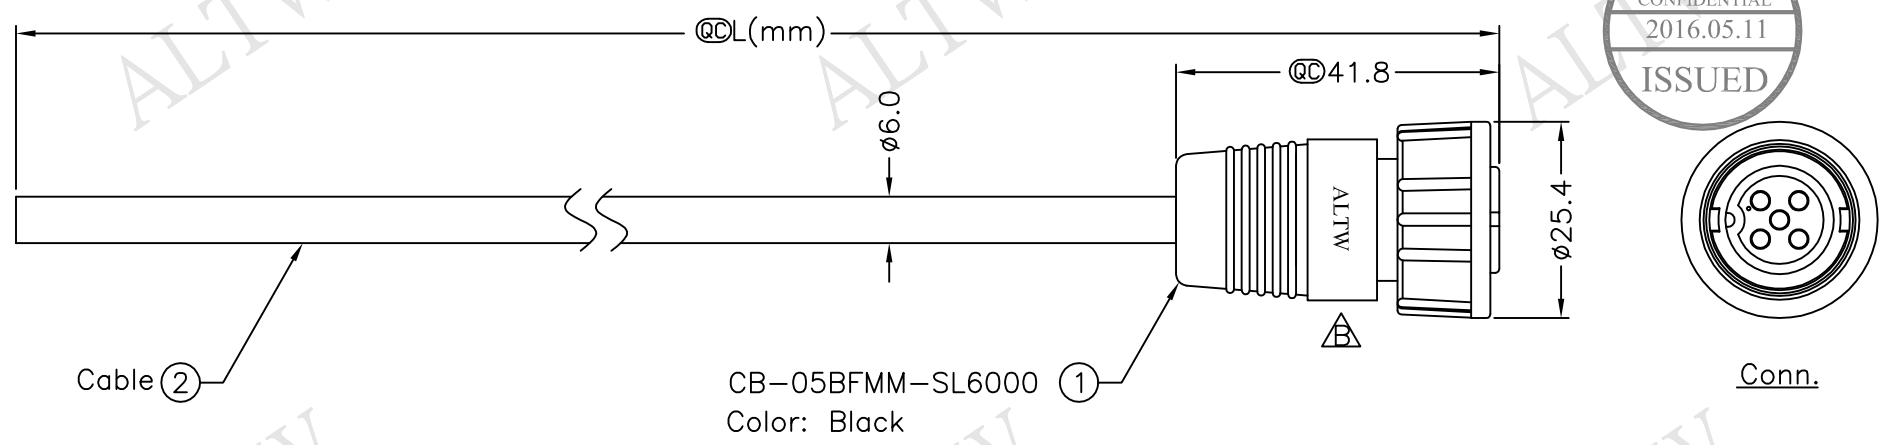

CB-05BFMM-SL6AXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

- Notes:
- * @@ Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Connector: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Ring: Black, EPDM
 - * Nut: Black, Nylon+GF
 - * Cable: UL2464 20AWG*5C+Drain+Al/My Black, PVC Jacket UV Resistant, OD=6.0mm
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

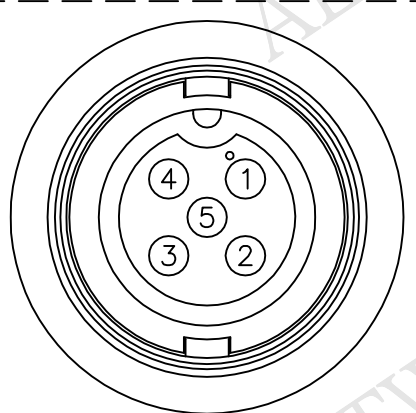

5	Green
4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
	Pin Out

UNIT:mm		TITLE	Middle	Amphenol LTW	ITEM NO	CB-05BFMM-SL6AXX	DRAWN BY	Ruru	DATE	2016/05/04	
TOLERANCE	±0.5 mm	SCALE	Free	SHEET	1 OF 1	CUSTOMER	ALTW	CHECKED BY	Rita	DATE	2016/05/04
REV.	B	SIZE	A4	QC	:Inspection Item			APPROVED BY	Lisa	DATE	2016/05/04

Amphenol LTW
 安費諾亮泰企業股份有限公司