
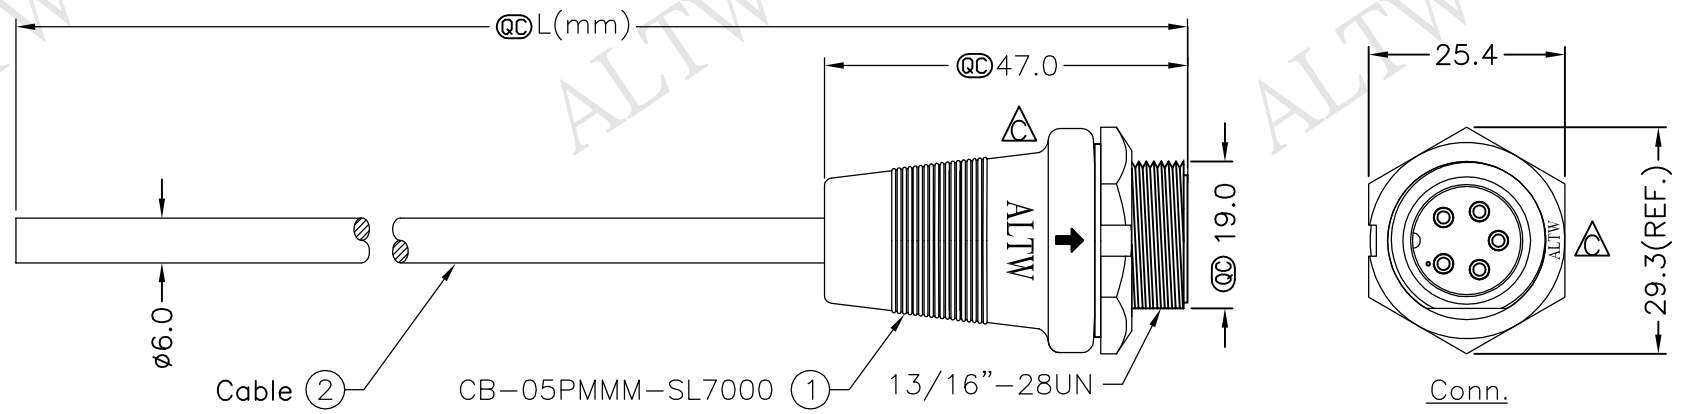


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	FN-8B0098~101	2008/09/25	Shin	Add Note
C	FN1630282~285	2016/03/07	Ruru	Change Logo & Note



Cable ② CB-05PMMM-SL7000
Color: Black


CB-05PMMM-SL7AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters


Cable Length(L):01~99Meters

Note:


- * QC Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 20AWG*5C+D+AL/My, PVC Jacket UV Resistant, OD=6.0, Black
- \triangle * Use with waterproof cap or dust cap
Panel Thickness Max: 1.2mm
- \triangle * Use without waterproof cap or dust cap
Panel Thickness Max: 2.0mm
- \triangle * Cable Length Tolerance: 01M: ± 40 mm
02M~05M: ± 60 mm
06M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

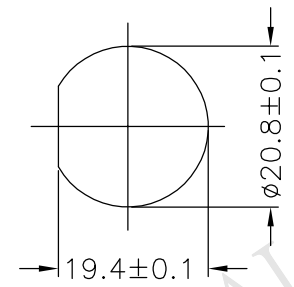

Recommended Panel Cut-Out



Pin Assignments Front View



5	Green	綠
4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	

Pin Out

UNIT:mm		TITLE
± 0.5 mm		Middle, Cable Screw 5 Pin M Conn. M Pin
SCALE	Free	SHEET 1 OF 1
REV. C	SIZE A4	QC : Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2016/03/07
DWG NO	CHECKED BY	DATE
CB-05PMMM-SL7AXX	Rita	2016/03/07
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016/03/07

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.