


Pin Assignments

Front View

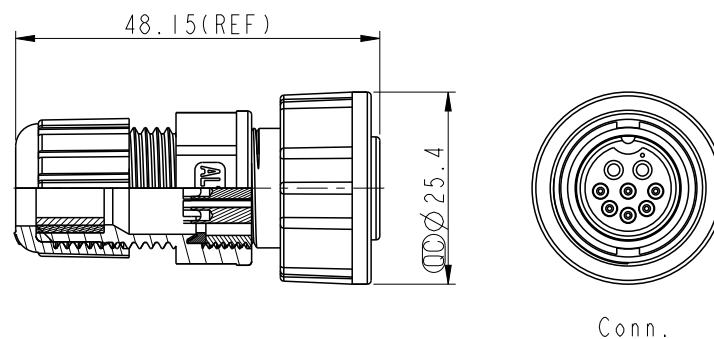

Conn.

Note:

- *  Important Dimensions To Check.
- * Waterproof Rate: IP67
- * Connector: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated
- * O-Ring: EPDM, Black
- * Screw Nut: Nylon+GF, Black
- * Gasket: EPDM, Black
- * Clamp Ring: Nylon, Black
- * Sealing Nut: Nylon, Black
- * Seals B1 for Cable OD: $\varnothing 7.6\text{mm} \sim \varnothing 9.6\text{mm}$
- * Seals B2 for Cable OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.6\text{mm}$
- * One Set Unassembled in One PE Bag.

UNIT: mm				TITLE MIDDLE CABLE SCREW 8PIN F CONN M PIN			<h1>Amphenol LTW</h1> <h2>安費諾亮泰企業股份有限公司</h2>		ITEM NO CBD-08BFMA-SL7001		DRAWN BY Ann		DATE 2015/08/10				
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±				SCALE 1:1		SIZE A4			SHEET 1 OF 1		DWG NO CBD-08BFMA-SL7001		CHECKED BY Nick		DATE 2015/08/10		
				REV. A		WC-REV. A.1			QC: Inspection item		CUSTOMER ALTW		APPROVED BY Lion		DATE 2015/08/10		