



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1620194~197	2016/01/15	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


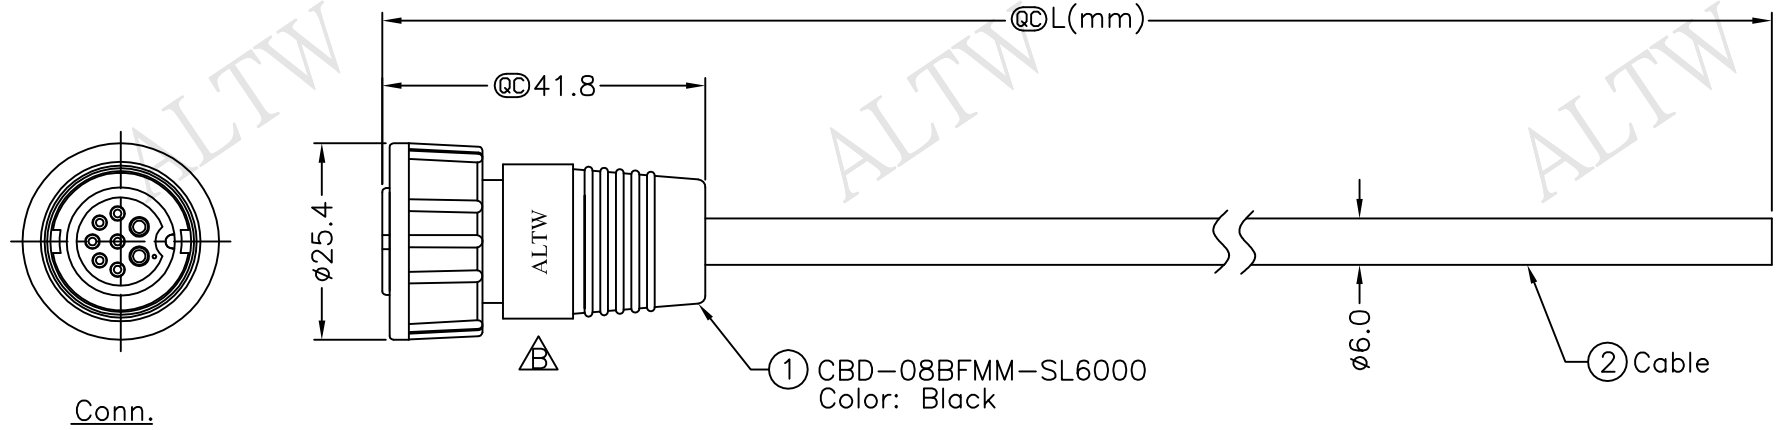


CBD-08BFMM-SL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters

Cable Length(L):01~99Meters



- Note:
- * @C Important Dimensions To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy,Gold Plated
 - * O-Ring: EPDM, Black
 - * Nut: Nylon+GF, Black
 - * Cable: UL2464 (20AWG*2C+24AWG*6C)+Drain+Al/My, PVC Jacket UV Resistant(+105°C~-20°C), OD=6.0, Black
 - * Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm



Pin Assignments
Front View

Conn.	Wire Color	AWG
8	Purple	24
7	Blue	20
6	Yellow	24
5	Orange	24
4	Red	24
3	Brown	24
2	Black	24
1	Green	20
Conn.	Wire Color	AWG
	Pin Out	

UNIT:mm		TITLE	Middle,Cable Screw 8Pin F Conn M Pin		ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5 mm	SCALE	Free	SHEET 1 OF 1	DWG NO	CHECKED BY	DATE
		REV.	B	SIZE	A4	APPROVED BY	DATE
				@C	:Inspection Item		
Amphenol LTW			安費諾亮泰企業股份有限公司		CUSTOMER	ALTW	
						Ruru	2016/01/15
						Rita	2016/01/15
						Lisa	2016/01/15