




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1650222~225	2016/05/05	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

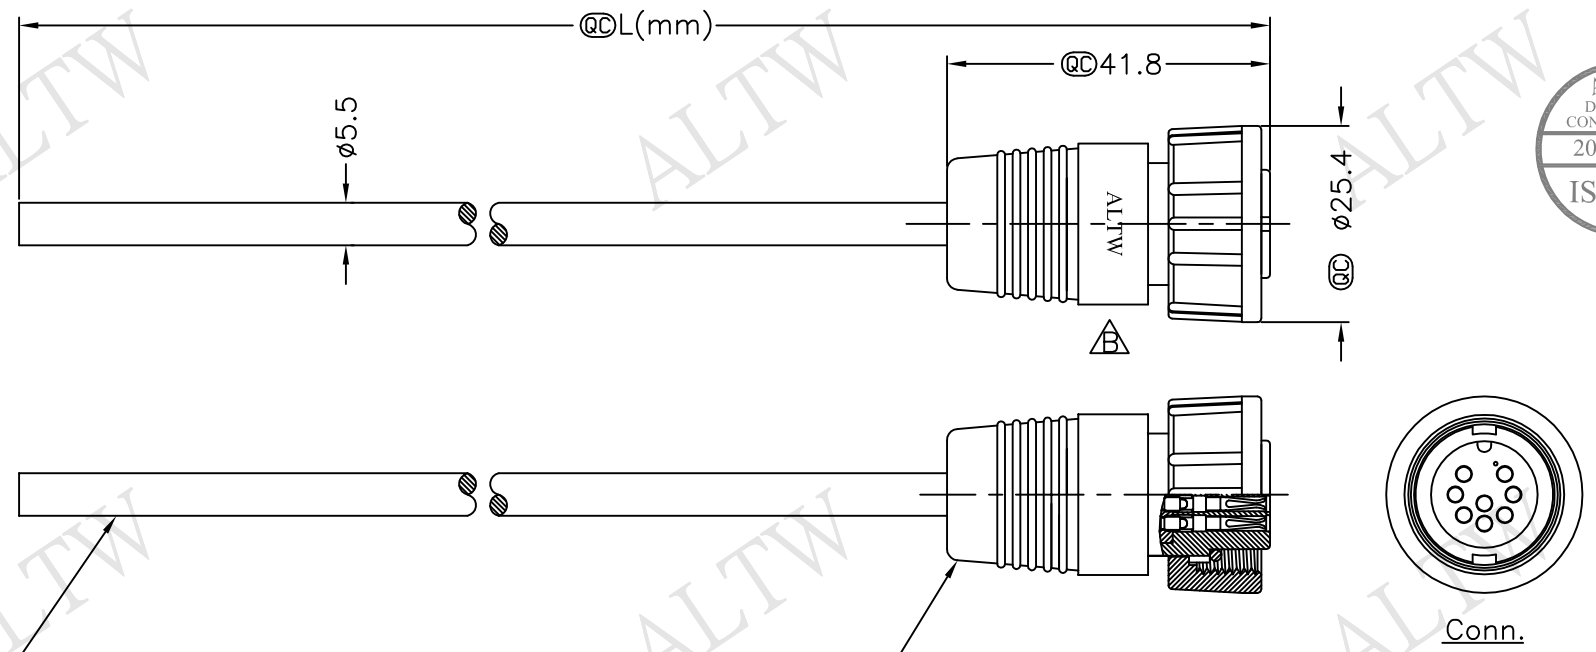

Cable ②

CD-08BFFM-SL6000 ①
Color: Black



Pin Assignments
Front View

8	Green
7	Yellow
6	Orange
5	Red
4	Blue
3	White
2	Brown
1	Black
Conn.	Wire Color
	Pin Out

CD-08BFFM-SL6AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ⋮
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF,Black
 - * Female Pin: Copper Alloy,Gold Plated
 - * Cable: UL2464 24AWG*8C+Drain+Al/My, Black,PVC Jacket UV Resistant, OD=5.5
 - △* Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

UNIT:mm TOLERANCE ±0.5 mm	TITLE Middle, Cable Screw 8Pin F Conn F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2016/05/05
	SCALE Free	SHEET 1 OF 1		DWG NO CD-08BFFM-SL6AXX	CHECKED BY Rita	DATE 2016/05/05
	REV. B	SIZE A4		CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/05/05
1	2	3	4	5	6	7