
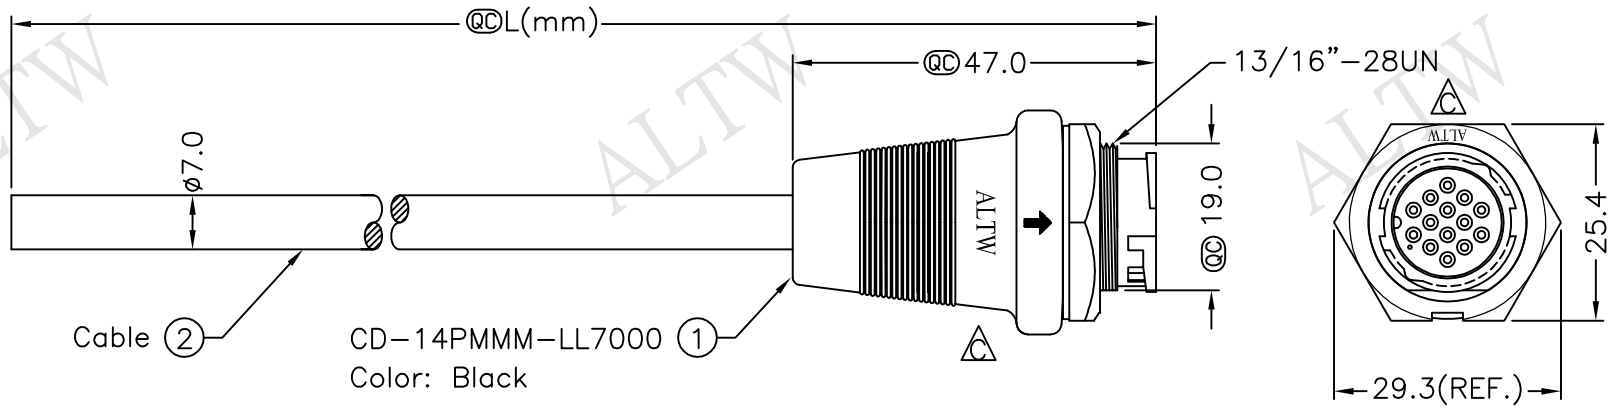


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0085~88	2008/09/25	Shin	Add Note
C	LEN1630541~44	2016/03/17	Ruru	Change Logo & Note




Cable ② CD-14PMMM-LL7000 ①
Color: Black


CD-14PMMM-LL7AXX

XX:01~99Meter
01:01Meter
02:02Meters
⋮
99:99Meters

Cable Length(L):01~99Meters

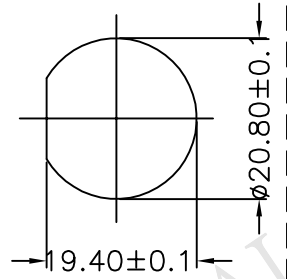

Recommended Panel Cut-Out



Pin Assignments Front View

7	Pink	粉紅	14	Brown/White	棕/白
6	Gray	灰	13	Black /White	黑/白
5	Yellow	黃	12	Light Green	淺綠
4	Green	綠	11	Purple	紫
3	White	白	10	Orange	橘
2	Blue	藍	9	Black	黑
1	Brown	棕	8	Red	紅
Conn.	Wire Color		Conn.	Wire Color	

Pin Out

Note:

- * @C Important Dimensions To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF,Black
- * Male Pin: Copper Alloy,Gold Plated
- * Cable: UL2464 24AWG*14C+D+AL/My Black,PVC Jacket UV Resistant, OD=7.0
- △* Use with waterproof cap or dust cap
Panel Thickness Max: 2.0mm
- △* Use without waterproof cap or dust cap
Panel Thickness Max: 3.0mm
- △* Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Middle, Cable Lock 14Pin M Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. C	SIZE A4
QC : Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2016/03/17
DWG NO CD-14PMMM-LL7AXX	CHECKED BY Rita	DATE 2016/03/17
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/03/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

A B C D E F