

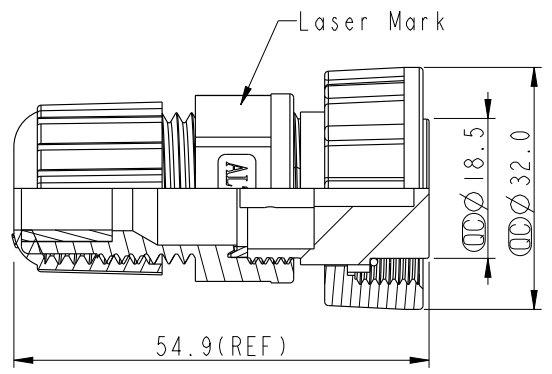


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN1520289	2015/02/11	Lu Di	Update LOGO
E	C200907	2020/06/12	Ruru	△E X3
F	C201074	2020/07/15	JC Chen	△E X1

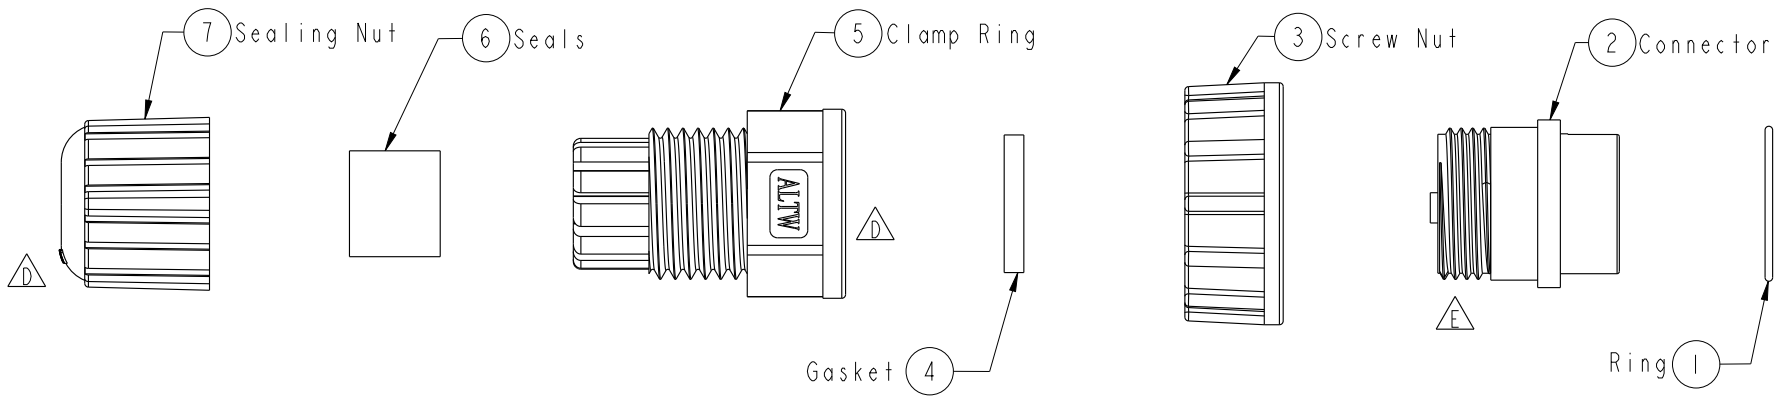

Pin Assignments
Front View 前視圖

- △E Note:
- * (M) Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * O-Ring: Rubber, Black
 - * Nut: Thermoplastic, Black
 - * Change Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Clamping Ring: Thermoplastic, Black
 - * Seals: Rubber, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seal For Cable OD: $\varnothing 5.5\text{mm} \sim 10.8\text{mm}$
 - * One Set Unassembled In One PE Bag
- △F * Laser Mark: YYWW (年+周, 4碼)
字型 Simplex: 字高 2mm.

UNIT: mm		TITLE			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY	DATE
		O CERES, D-20A, 02P, CABLE W/O SR F, F, FI SOLDER, SCREW				DC-02BFFA-SL7001	Lu Di	2015/02/11
TOLERANCE	.X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE	SIZE	SHEET	OF	DWG NO	CHECKED BY	DATE
		1:1	A4	1	1	DC-02BFFA-SL7001	Joyy	2015/02/11
		REV.	WC-REV.			CUSTOMER	APPROVED BY	DATE
		F	A.3			ALTW	Jerry	2015/02/11