




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1380254~257	2013/08/20	Ruru	Change Logo & Modify Note
C	C200907	2020/06/12	Ruru	AX3

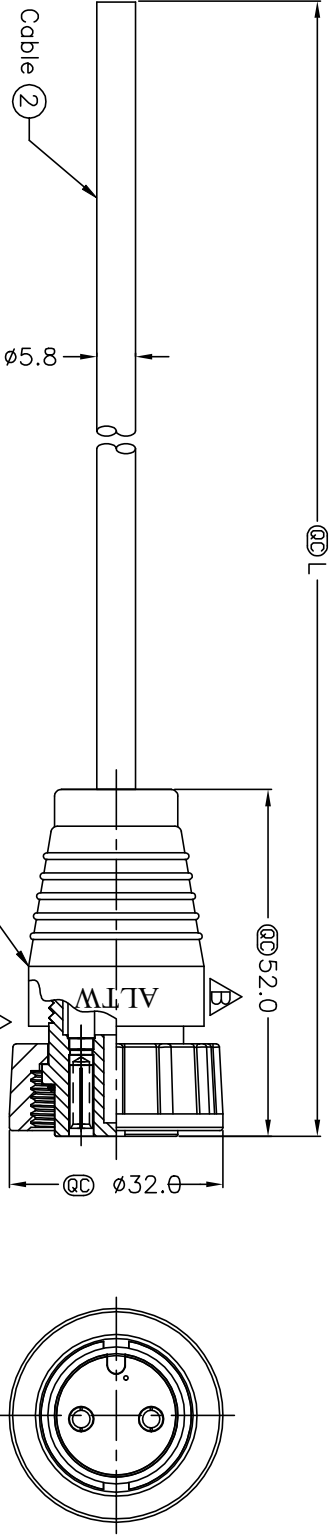

DC-02BFFM-SL6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ...
- 99:99Meters

Cable Length(L):01~99 Meter



Black	黑	2
Red	紅	1
Wire Color		Conn.
Pin Out		

- Note:**
- \* @Important Dimension.
  - \* Waterproof Rate: IP66
  - \* Housing: Thermoplastic, Black
  - \* Female Pin: Copper Alloy, Gold Plated
  - \* O-Ring: Rubber, Black
  - \* ScrewNut: Thermoplastic, Black
  - \* Cable:UL2464 16AWG\*2C+T
  - UV Resistant OD=5.8mm, Black
- A** Cable Length Tolerance: 01M:40mm  
 02M~05M:60mm  
 06M~10M:100mm  
 11M~30M:200mm  
 31M~99M:500mm

Pin Assignments  
 Front View 前视图

UNIT:mm		TITLE	0 CERES, D-20A, 02P, CABLE W/O SR
TOLERANCE	$\pm 0.5$ mm	SCALE	1 : 1
REV.	C	SIZE	A4
		SHEET	1 OF 1
		①	inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DC-02BFFM-SL6AXX	DRAWN BY	Ruru	DATE	2013/08/20
DWG NO	DC-02BFFM-SL6AXX	CHECKED BY	Vicky	DATE	2013/08/20
CUSTOMER	ALTW	APPROVED BY	Rita	DATE	2013/08/20