





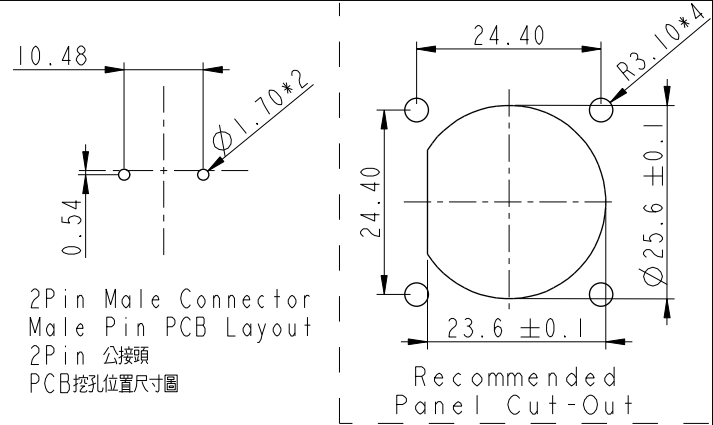


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1730315	2017/03/21	Vicky	Update Logo
D	LEN1840084	2018/04/14	Ethan	Modify Panel Thickness
E	CI90310	2019/03/12	Ruru	Modify Note



- Note: 
- \*  Important Dimension
  - \* Waterproof Rate: IP67, Unmated
  - \* Housing: Thermoplastic, Black
  - \* Pin: Copper Alloy, Gold Plated
  - \* Nut: Thermoplastic, Black
  - \* Gasket: Rubber, Black
  -  \* Use Waterproof Cap or Dust Cap  
Panel Thickness Max: 1.8mm
  -  \* Use without Waterproof Cap or Dust Cap  
Panel Thickness Max: 3.0mm
  - \* Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE Screw Type Connector For Panel Mount 2Pin Male Connector Male Pin(20A)	
TOLERANCE		SCALE	SIZE
.X	±0.25	1:1	A4
.XX	±0.1		
.XXX	±0.05	REV.	E
ANGLES	±1°	WC-REV.	A.3
		 Inspection item	

Amphenol LTW  
安費諾亮泰企業股份有限公司

ITEM NO	DC-02PMMP-SS7001	DRAWN BY	Ruru	DATE	2019-03-12
DWG NO	DC-02PMMP-SS7001	CHECKED BY	Rita	DATE	2019-03-12
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.