




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1380270~273	2013/08/20	Ruru	Change Logo & Modify Note
C	C200915	2020/06/17	Ruru	△X3

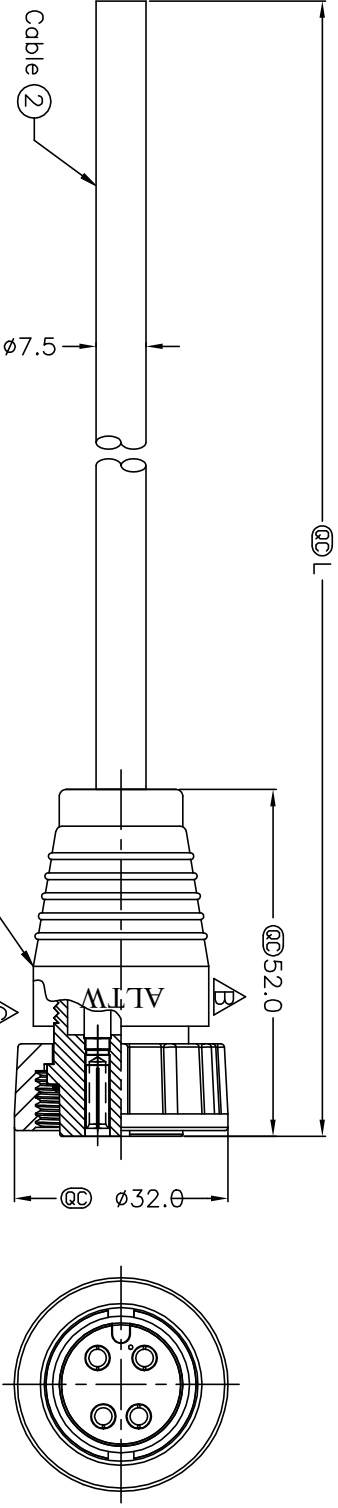

DC-04BFFM-SL6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ...
- 99:99Meters

Cable Length(L):01~99 Meter



Orange	橙	4
Red	紅	3
Brown	棕	2
Black	黑	1
Wire Color		Conn.
Pin Out		

Pin Assignments  
Front View 前視圖

△Note:

- \* @Important Dimension.
- \* Waterproof Rate: IP66
- \* Housing: Thermoplastic, Black
- \* Female Pin: Copper Alloy, Gold Plated
- \* O-Ring: Rubber, Black
- \* Screw Nut: Thermoplastic, Black
- \* Cable: UL2464 16AWG\*4C+AL/MY
- \* UV Resistant OD=7.5mm, Black

△ Cable Length Tolerance: 01M:40mm  
02M~05M:60mm  
06M~10M:100mm  
11M~30M:200mm  
31M~99M:500mm

UNIT:mm		TITLE	0 CERES, D-20A, 04P, CABLE W/O SR		ITEM NO	DC-04BFFM-SL6AXX		DRAWN BY	Ruru	DATE	2013/08/20
TOLERANCE	±0.5 mm	SCALE	1 : 1	SIZE	A4	SHEET	1 OF 1	CHECKED BY	Vicky	DATE	2013/08/20
REV.	C	REV.	C	SIZE	A4	⑩	inspection Item	APPROVED BY	Rita	DATE	2013/08/20
Amphenol LTW			安費諾亮泰企業股份有限公司			CUSTOMER		ALTW		8 FAWM0702-01-01A2	