

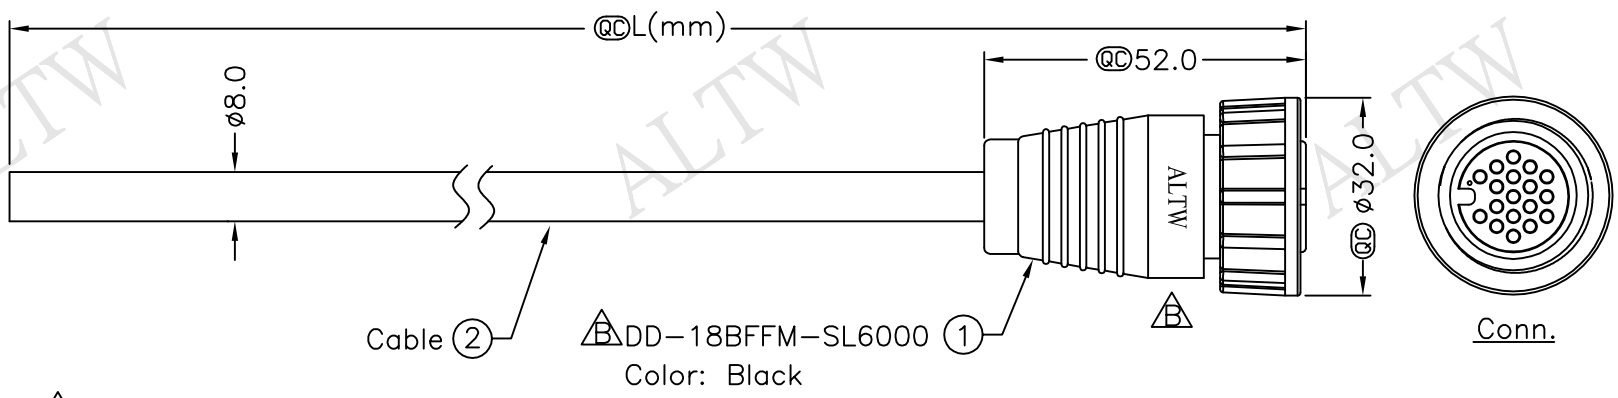


| | | | |
|--------|------------------------|-----------------|--------------------------------|
| 5 | 6 | 7 | 8 |
| REV. B | ECN NO. LEN1640171~174 | DATE 2016/04/01 | SIGN Ruru |
| | | | DESCRIPTION Change Logo & Note |

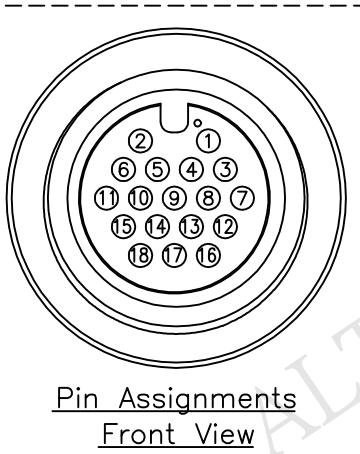

△ DD-18BFFM-SL6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable length(L):01~99Meters

△ DD-18BFFM-SL6000
 Color: Black



| | | | |
|-------|------------|-------|--------------|
| 9 | Black | 18 | Blue/White |
| 8 | Red | 17 | Green/White |
| 7 | Pink | 16 | Orange/White |
| 6 | Gray | 15 | Red/White |
| 5 | Yellow | 14 | Brown/White |
| 4 | Green | 13 | Black/White |
| 3 | White | 12 | Light Green |
| 2 | Blue | 11 | Purple |
| 1 | Brown | 10 | Orange |
| Conn. | Wire Color | Conn. | Wire Color |
| | Pin Out | | Pin Out |

Note:
 * @C Important Dimension To Check.
 * Waterproof Rate: IP66
 * Housing: Nylon+GF, Black
 * Pin: Copper Alloy, Gold Plated
 * Cable: UL2464 24AWG*18C+Drain+Al/My, PVC Jacket UV Resistant, OD=8.0, Black
 △* Cable Length Tolerance: 01M: ±40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

| | |
|-----------|---------|
| UNIT:mm | |
| TOLERANCE | ±0.5 mm |

| | | |
|--------|--------------------------------------|---------------------|
| TITLE | Large Cable Screw 18Pin F Conn F Pin | |
| SCALE | Free | SHEET 1 OF 1 |
| REV. B | SIZE A4 | @C :Inspection Item |

Amphenol LTW
 安費諾亮泰企業股份有限公司

| | |
|----------|------------------|
| ITEM NO | |
| DWG NO | DD-18BFFM-SL6AXX |
| CUSTOMER | ALTW |

| | | | |
|-------------|------|------|------------|
| DRAWN BY | Ruru | DATE | 2016/04/01 |
| CHECKED BY | Rita | DATE | 2016/04/01 |
| APPROVED BY | Lisa | DATE | 2016/04/01 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F
E
D
C
B
A

1 2 3 4 5 6 7 8